

Apache NiFi Registry 3

Apache NiFi Registry User Guide

Date of Publish: 2018-11-15



<https://docs.hortonworks.com/>

Contents

Introduction.....	4
Browser Support.....	4
Unsupported Browsers.....	4
Viewing the UI in Variably Sized Browsers.....	4
Terminology.....	4
NiFi Registry User Interface.....	5
Logging In.....	5
Manage Flows.....	6
View a Flow.....	6
Sorting & Filtering Flows.....	8
Delete a Flow.....	9
Manage Buckets.....	10
Sorting & Filtering Buckets.....	10
Create a Bucket.....	11
Delete a Bucket.....	12
Delete Multiple Buckets.....	13
Edit a Bucket Name.....	15
Bucket Policies.....	16
Create a Bucket Policy.....	16
Delete a Bucket Policy.....	19
Manage Users & Groups.....	20
Sorting & Filtering Users/Groups.....	20
Add a User.....	21
Delete a User.....	22
Delete Multiple Users.....	23
Edit a User Name.....	25
Special Privileges.....	26
Grant Special Privileges to a User.....	26
Manage Groups.....	27
Add an Empty Group.....	28
Add User to a Group.....	29
Create a New Group with Selected Users.....	31
Remove a User from a Group.....	33

User Window.....	33
Group Window.....	34
Other Group Level Actions.....	35

Introduction

Apache NiFi Registry-a subproject of Apache NiFi-is a complementary application that provides a central location for storage and management of shared resources across one or more instances of NiFi and/or MiNiFi.

The first implementation of the Registry supports versioned flows. Process group level dataflows created in NiFi can be placed under version control and stored in a registry. The registry organizes where flows are stored and manages the permissions to access, create, modify or delete them.

Browser Support

Browser	Version
Chrome	Current and Current - 1
FireFox	Current and Current - 1
Safari	Current and Current - 1

Current and Current - 1 indicates that the UI is supported in the current stable release of that browser and the preceding one. For instance, if the current stable release is 62.X then the officially supported versions will be 62.X and 61.X.

For Safari, which releases major versions much less frequently, Current and Current - 1 simply represent the two latest releases.

The supported browser versions are driven by the capabilities the UI employs and the dependencies it uses. UI features will be developed and tested against the supported browsers. Any problem using a supported browser should be reported to Apache NiFi.

Unsupported Browsers

While the UI may run successfully in unsupported browsers, it is not actively tested against them. Additionally, the UI is designed as a desktop experience and is not currently supported in mobile browsers.

Viewing the UI in Variably Sized Browsers

In most environments, all of the UI is visible in your browser. However, the UI has a responsive design that allows you to scroll through screens as needed, in smaller sized browsers or tablet environments.



Note: The minimum recommended screen size is 1080px X 445px.

Terminology

Flow: A process group level NiFi dataflow that has been placed under version control and saved to the Registry.

Bucket: A container that stores and organizes flows.


Policy: Defines a user or group's ability to import, view, commit changes and/or delete flows.

NiFi Registry User Interface

The NiFi Registry UI displays the shared resources available and provides mechanisms for creating and administering users/groups, buckets and policies.

When the application is started, the user is able to navigate to the UI by going to the default address of `http://%3Chostname%3E:18080/nifi-registry` in a web browser. There are no permissions configured by default, so anyone is able to view and modify the flows and buckets.

When an administrator navigates to the UI for the first time, the registry is empty as there are no flow resources available to share yet:

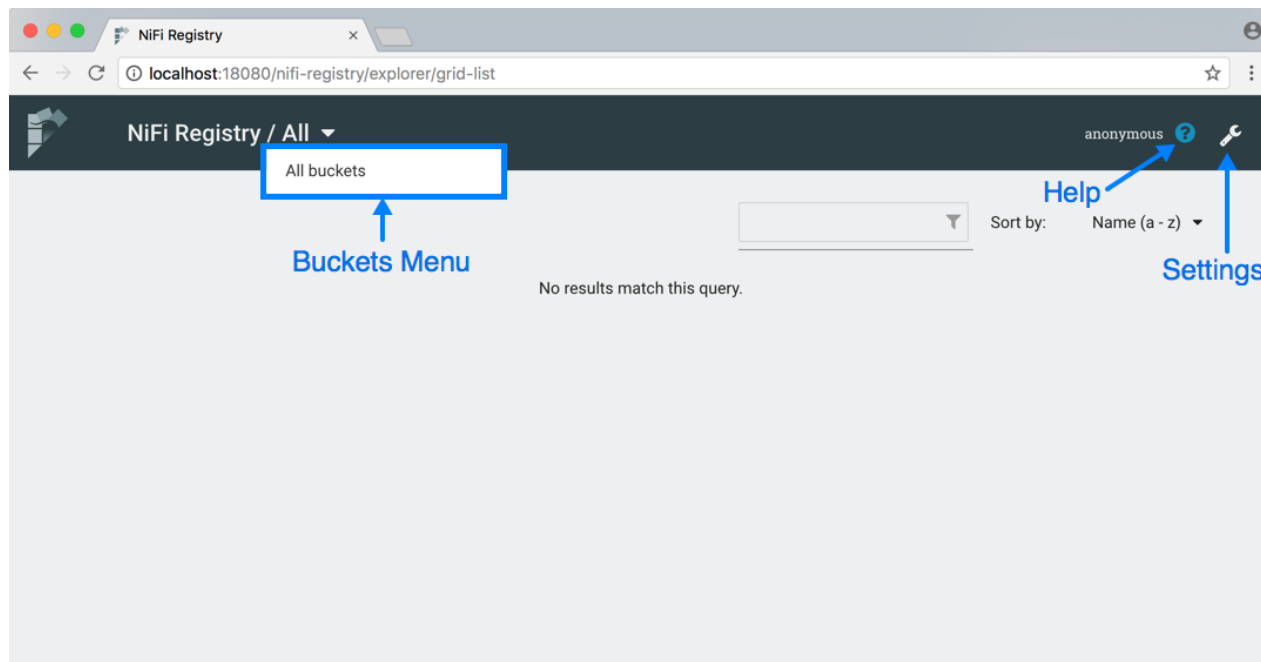

The Buckets menu is available at the top left of the screen. It allows the user to display flows based on which bucket they are contained in. On the top right of the screen is the Settings button



which accesses functionality for managing users, groups, buckets and policies. Next to the Settings button is the Help button




which accesses the NiFi Registry Documentation.

Logging In

If NiFi Registry is configured to run securely, users will have to be granted permissions to buckets by an administrator.

If the user is logging in with their username/password they will be presented with a screen to do so.

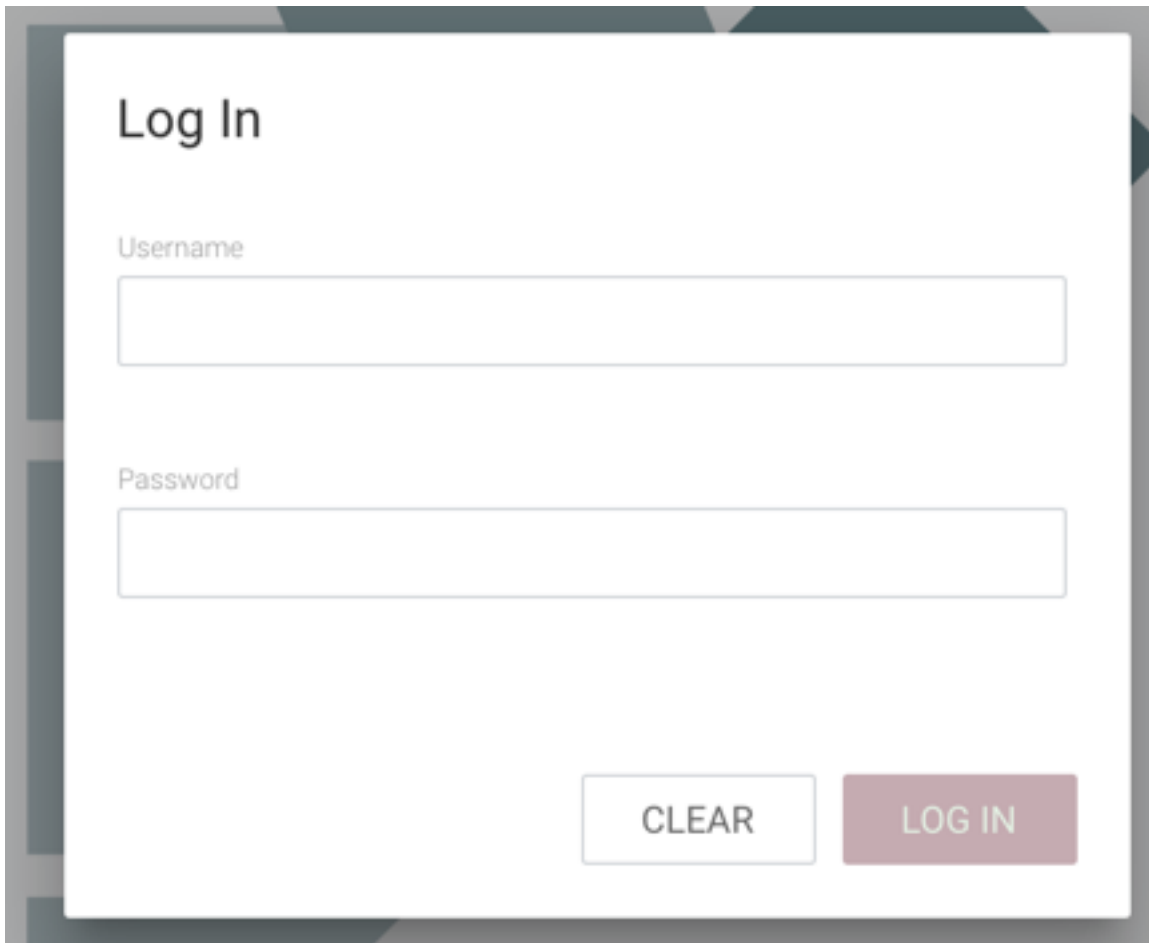A screenshot of a 'Log In' form. The form is white with a dark grey border. It features a title 'Log In' at the top left. Below the title are two input fields: 'Username' and 'Password'. At the bottom right of the form are two buttons: 'CLEAR' and 'LOG IN'. The 'LOG IN' button is highlighted in a reddish-brown color.

Log In

Username


Password

CLEAR LOG IN


Manage Flows

View a Flow


Flows in all buckets are listed in the main window of the UI by default. If the registry is secured, only the flows in the buckets that the user has access to are listed.

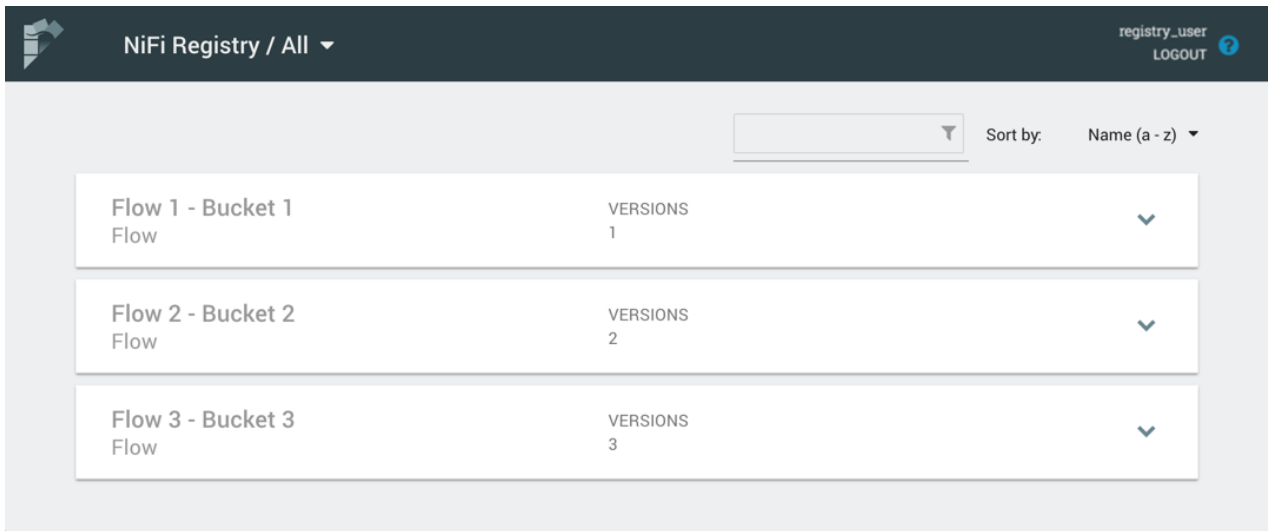

To see the flows in a particular bucket, select that bucket from the drop-down menu at the top left of the UI.

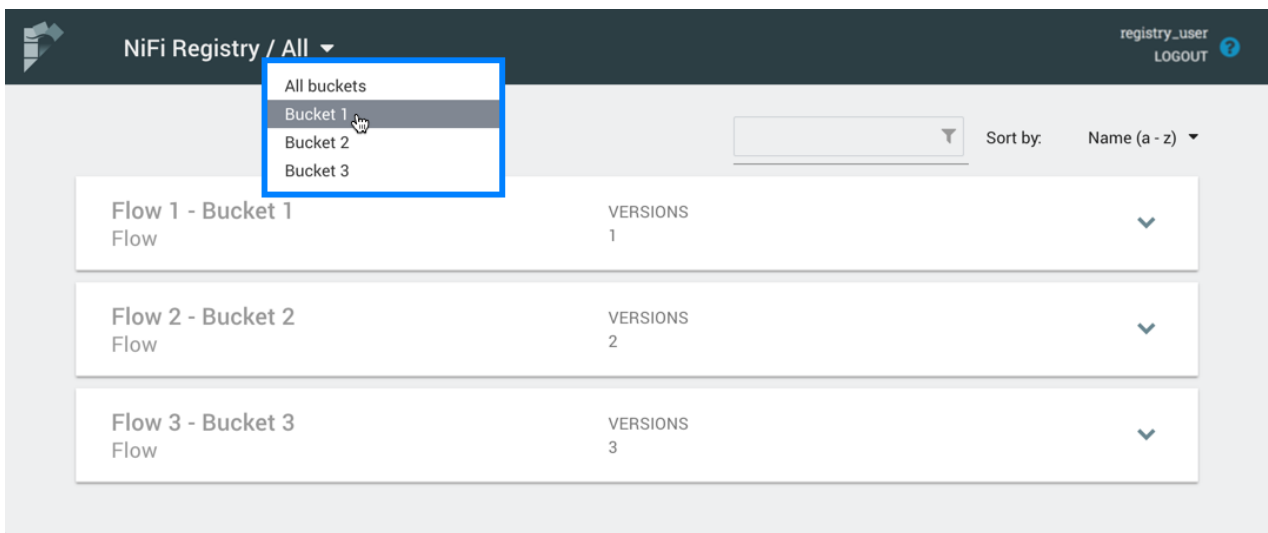


Click on a flow to see its Description and Change Log:

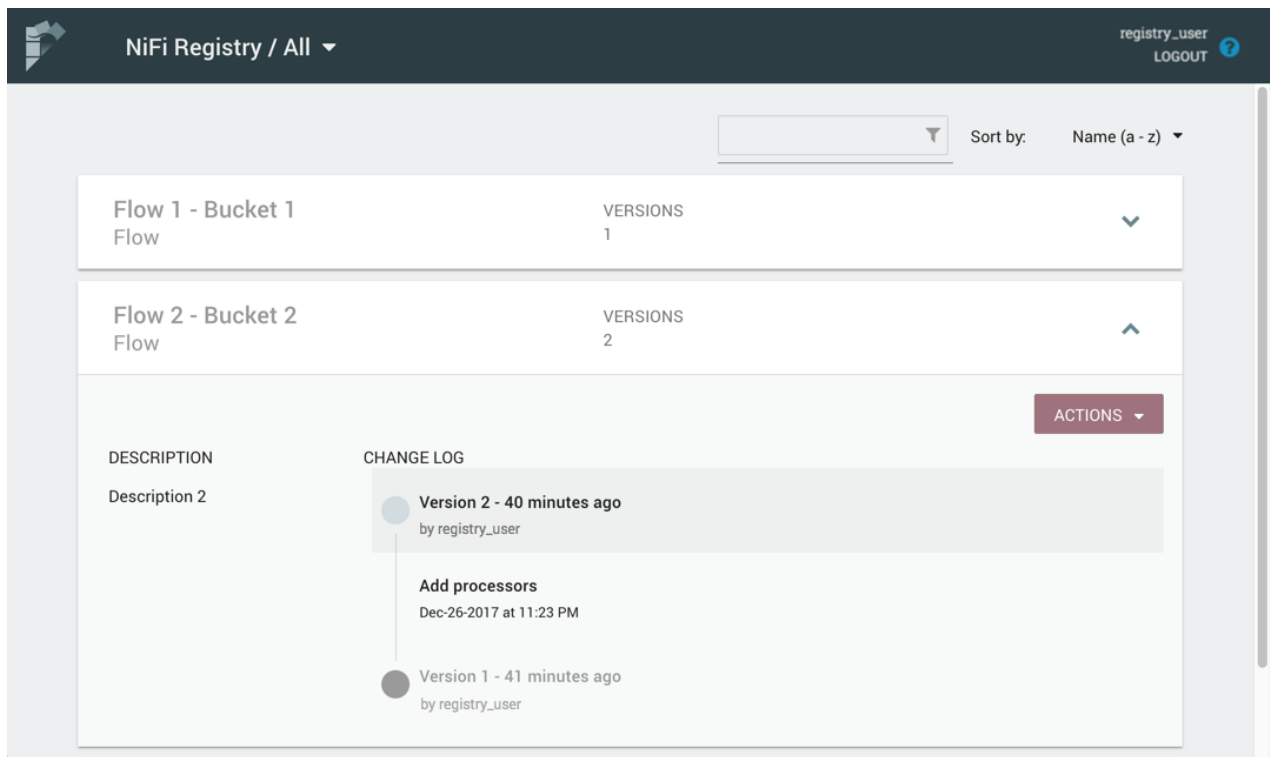

The Change Log includes all versions that were saved for a flow. Clicking on the version reveals details about when the version was saved, which user committed the save, and any comments entered by the user.

Sorting & Filtering Flows


Flows can be sorted alphabetically by Name (ascending or descending) or by Update (newest or oldest) using the drop-down at the top right of the UI.

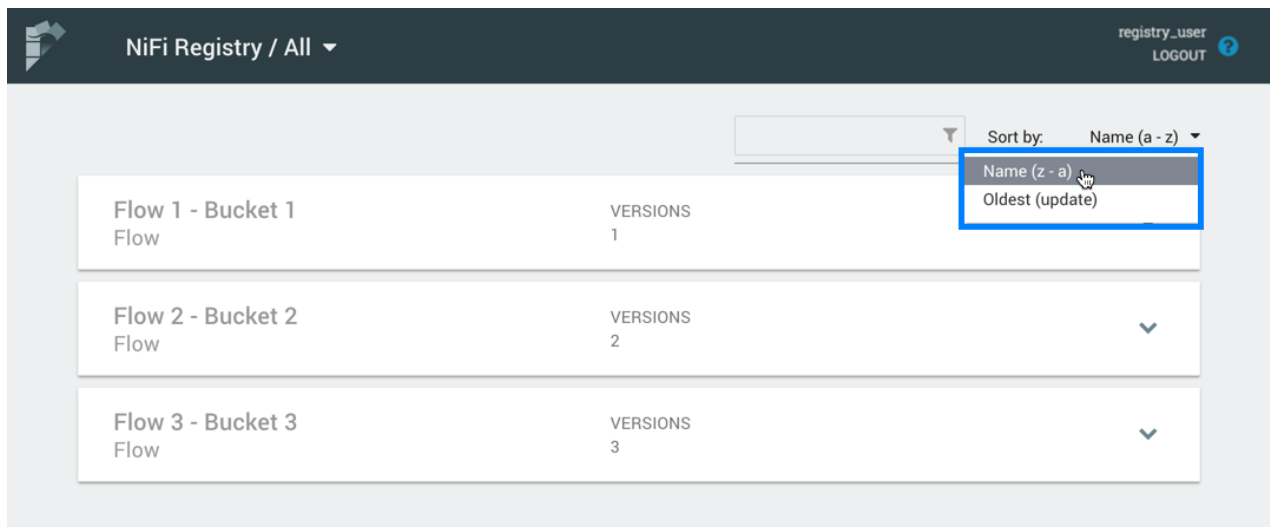

The flow list can be filtered by:

- flow name
- flow description
- flow ID
- bucket name
- bucket ID


Here is an example filtering by flow name:

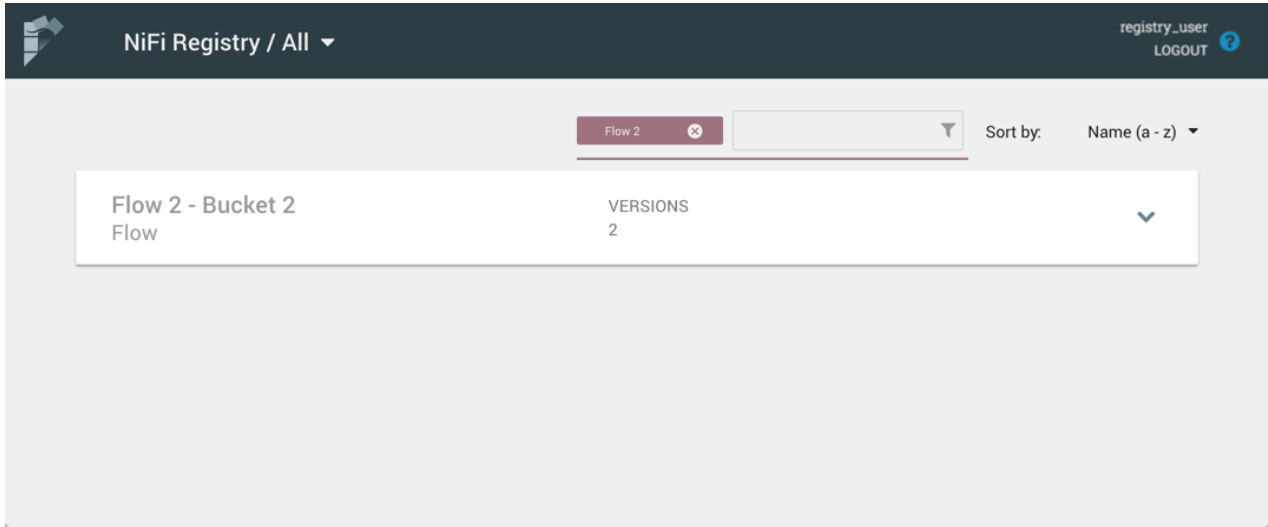


Delete a Flow

To delete a flow from the registry:

1. Click on the flow to see its details.
2. Select the "Actions" drop-down and click the "Delete" menu option.

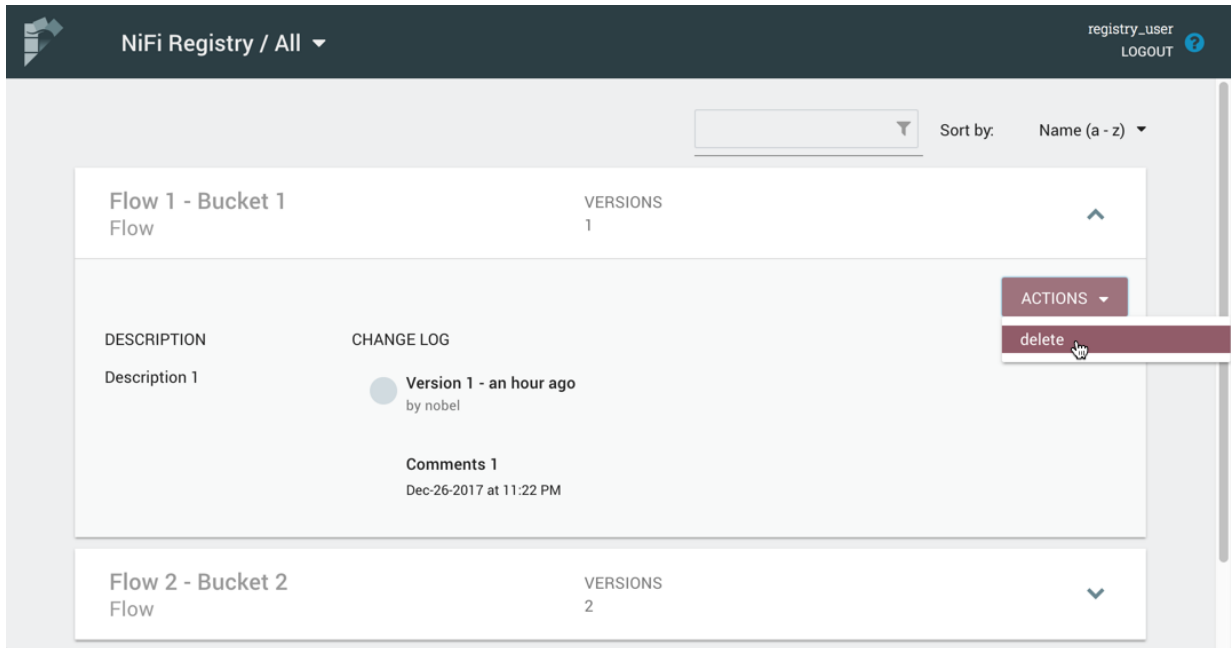

3. Select "Delete" to confirm.

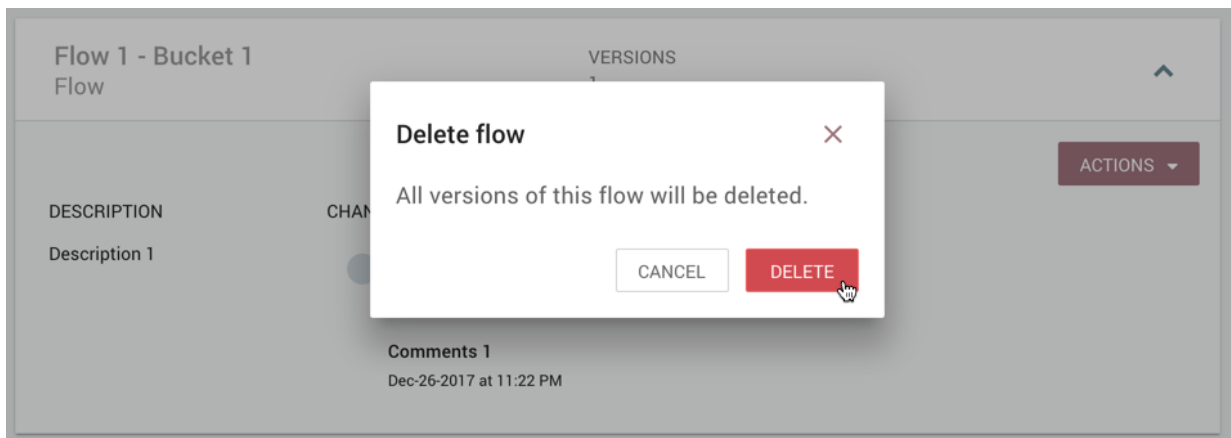

It is possible to delete a flow that is actively being used in NiFi.

Manage Buckets


To manage buckets, enter the Administration section of the Registry by clicking the Settings button



on the top right of the UI. The Buckets window appears by default.

Sorting & Filtering Buckets

Buckets can be sorted alphabetically by Name (ascending or descending) using the up/down arrows.

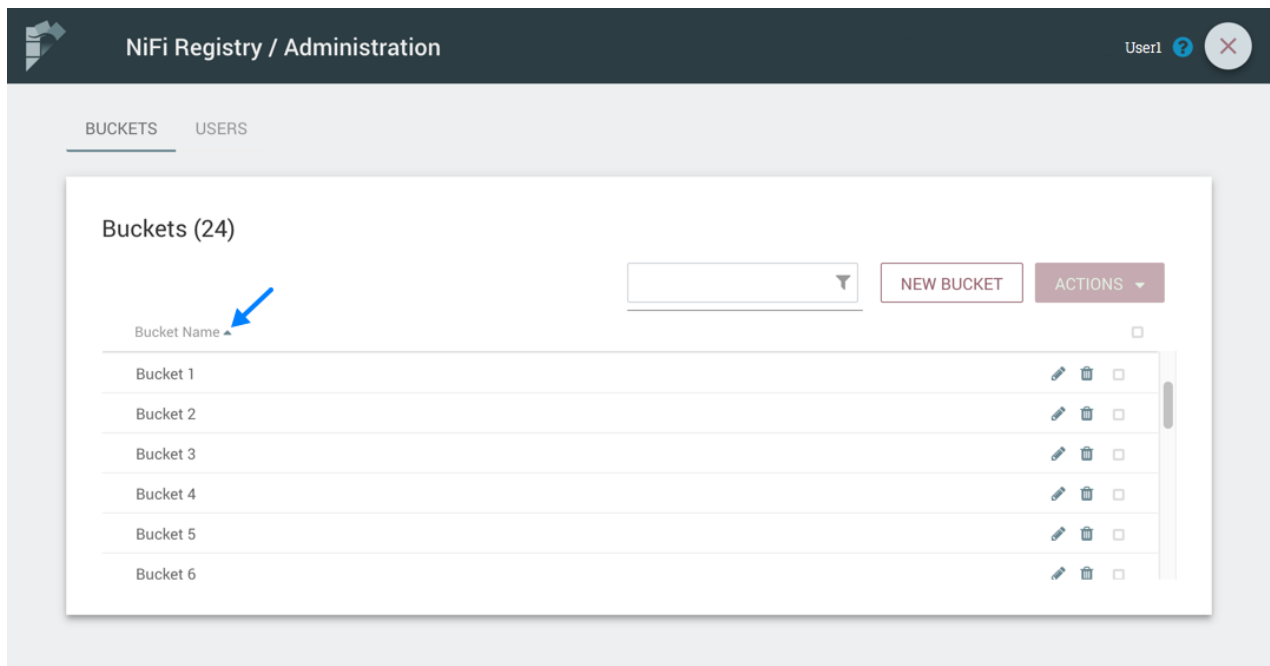


The buckets listed can be filtered by:

- bucket name


- bucket description
- bucket ID

Here is an example filtering by bucket name:

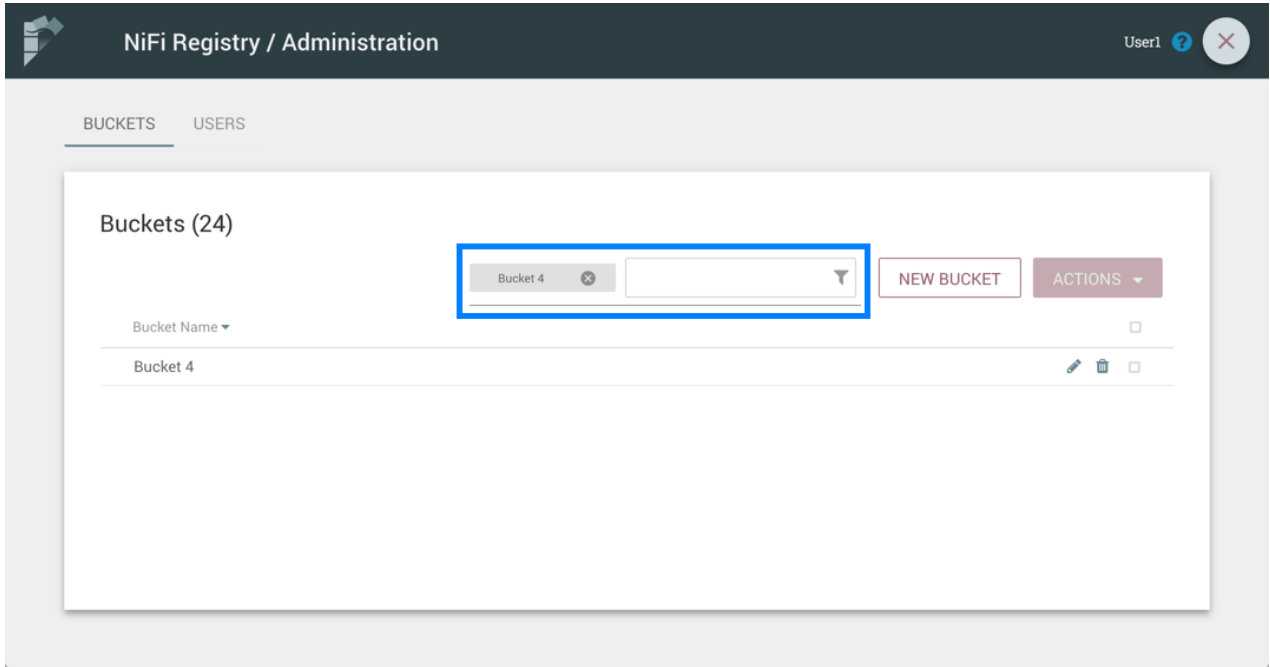


Create a Bucket

1. Select the "New Bucket" button.

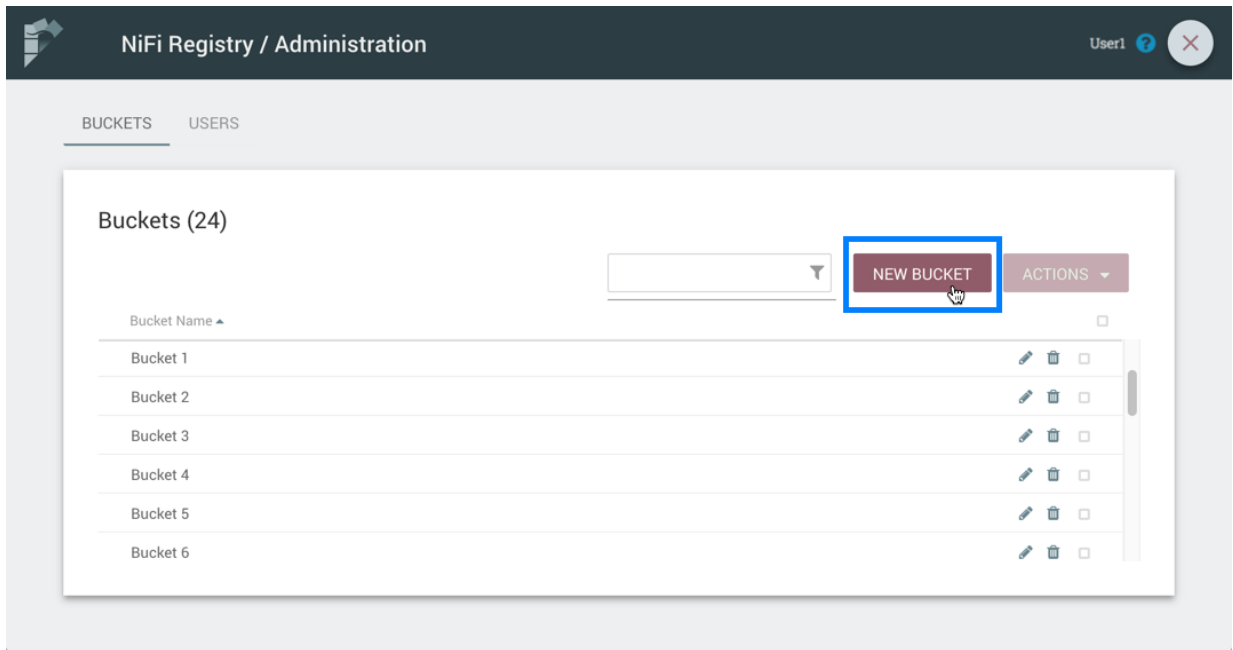

2. Enter the desired bucket name and select the "Create" button.

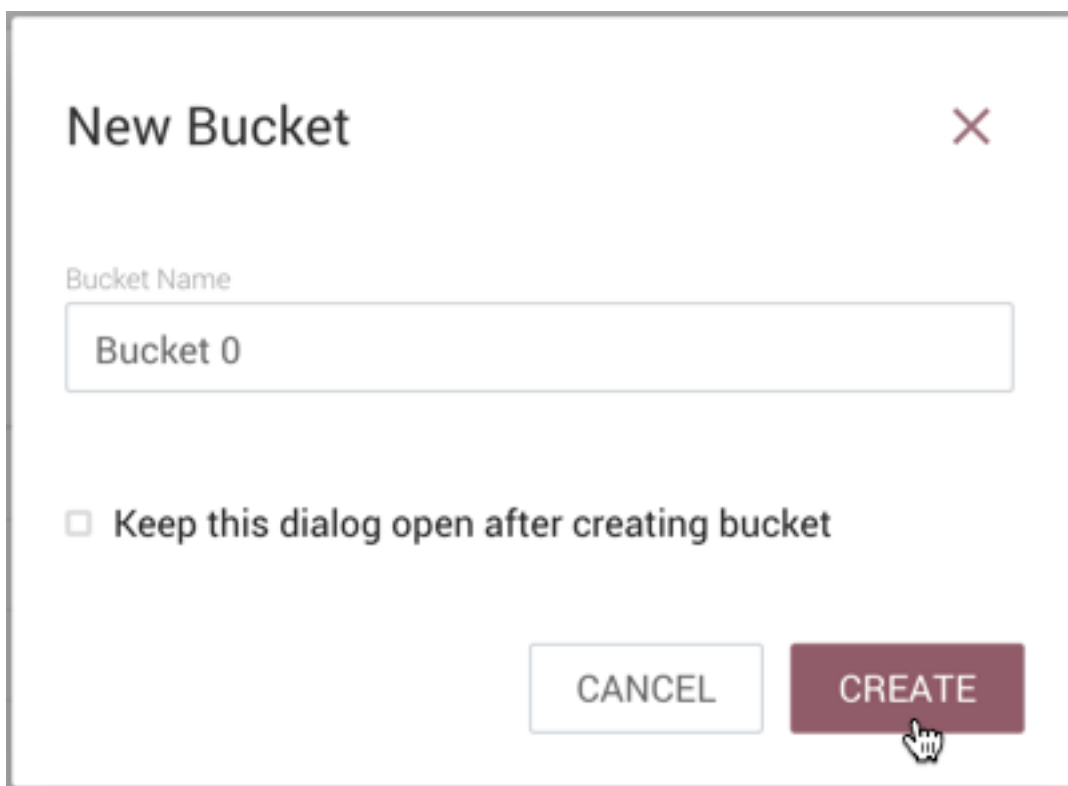

New Bucket

Bucket Name

Bucket 0

Keep this dialog open after creating bucket

CANCEL CREATE




Note: To quickly create multiple buckets, check "Keep this dialog open after creating bucket".

Delete a Bucket


1. Select the Delete button



(in the row of the bucket.)

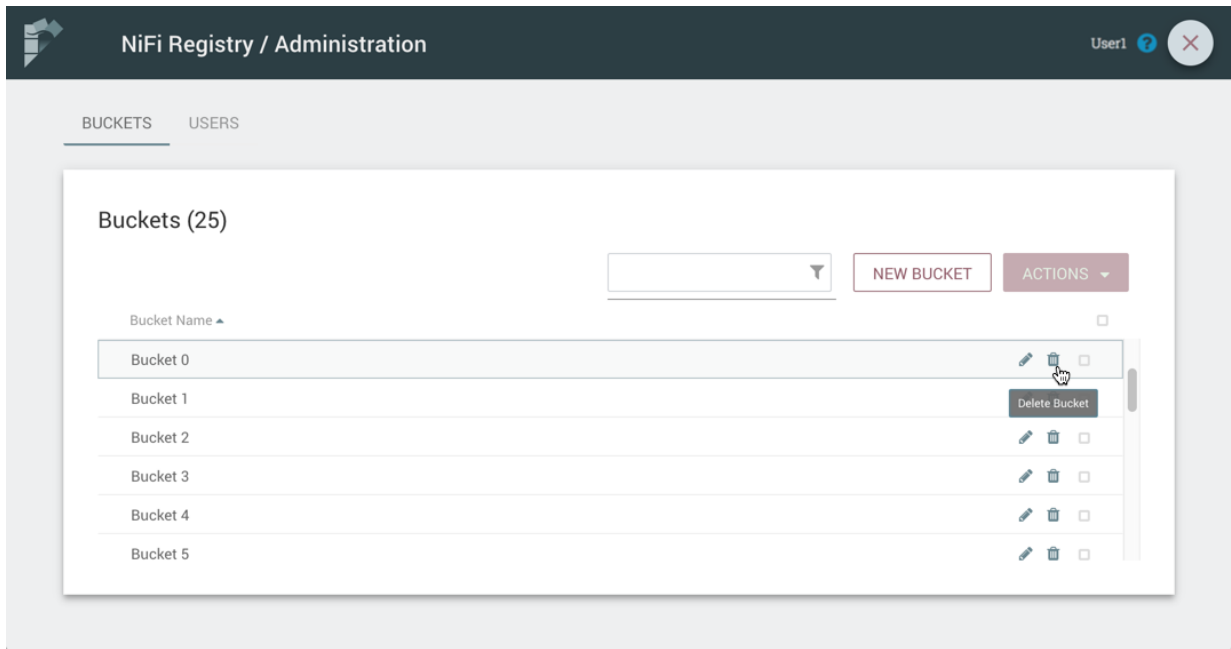


- From the Delete Bucket dialog, select "Delete".

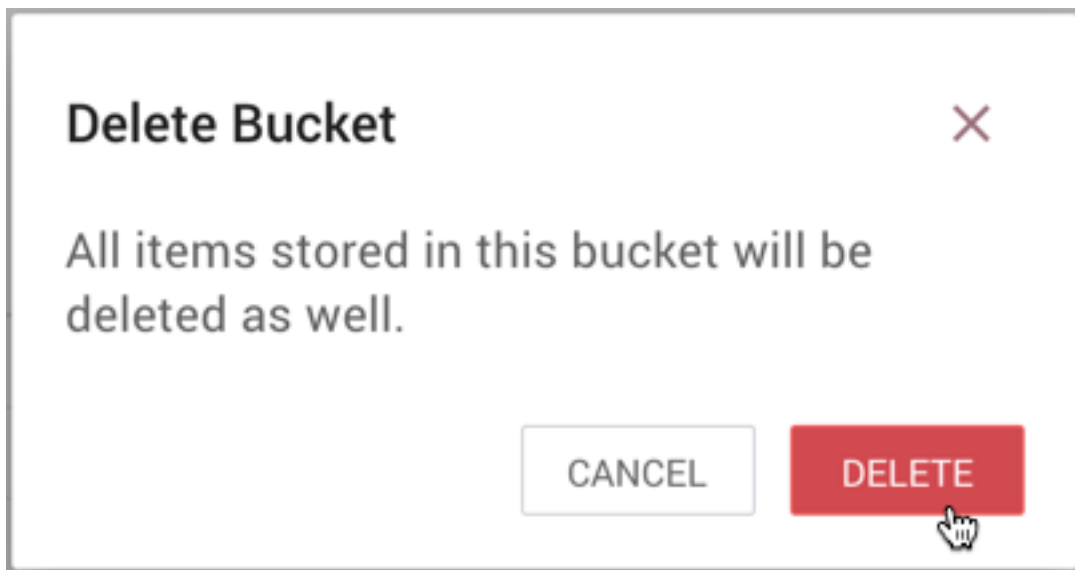


Delete Multiple Buckets


- Select the checkboxes in the rows of the desired buckets to delete.

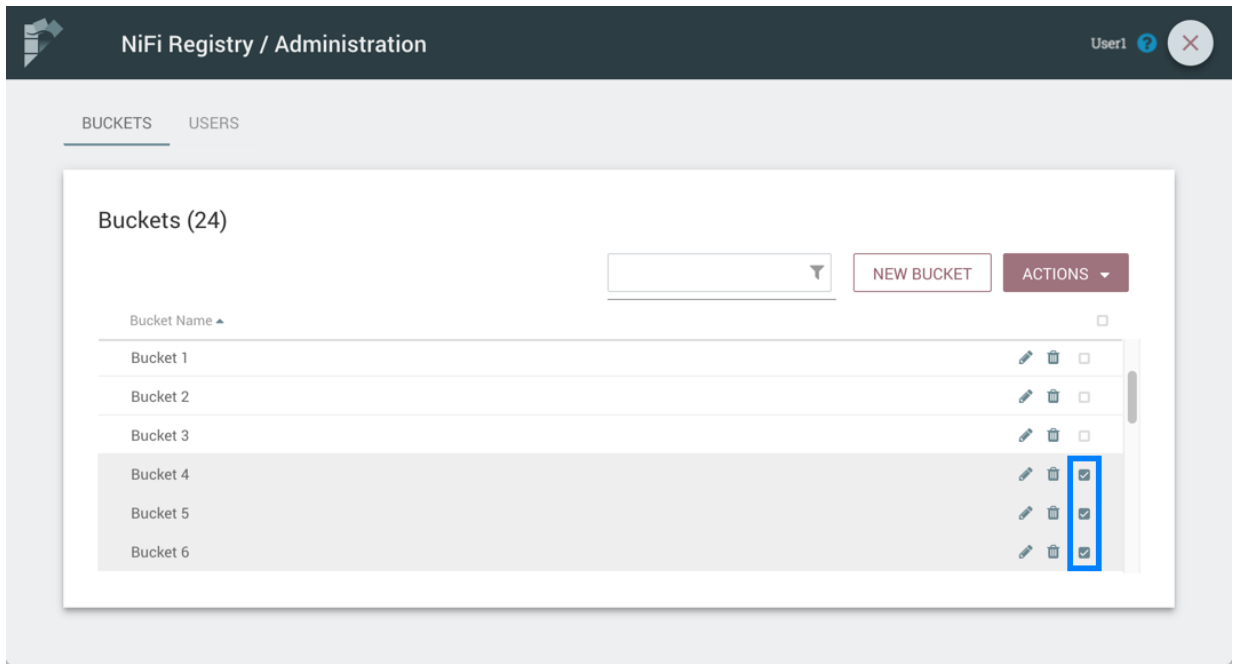

2. Select the "Actions" drop-down and click the "Delete" option.

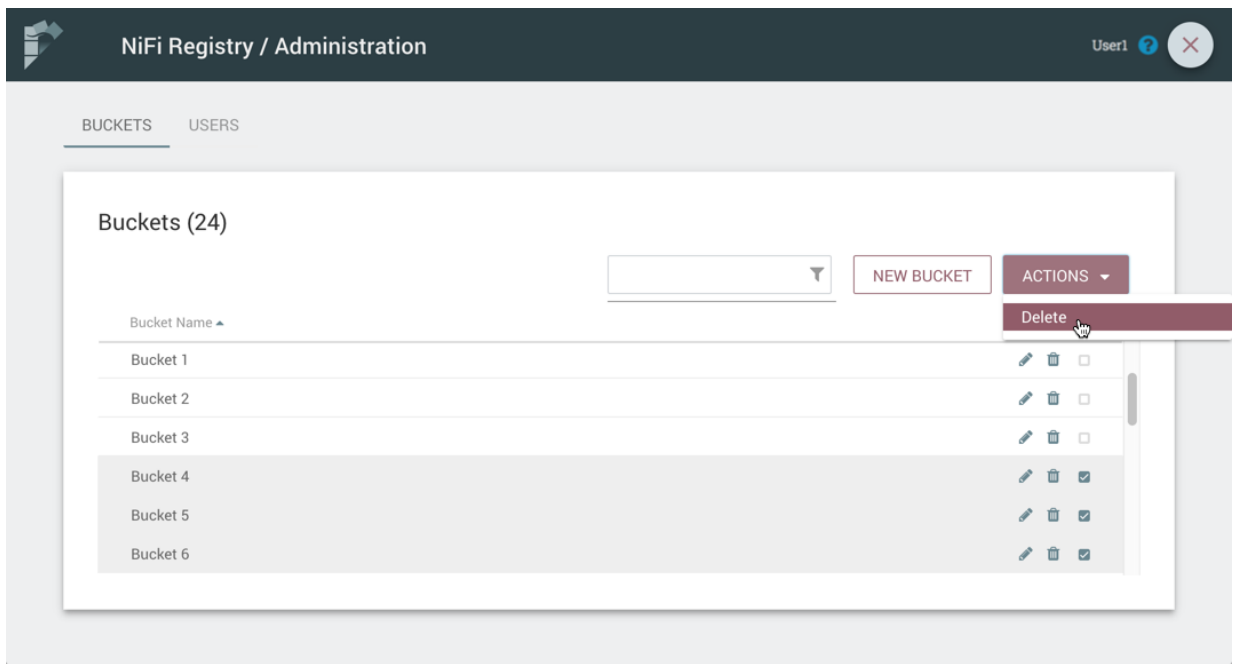


3. From the Delete Buckets dialog, select "Delete".

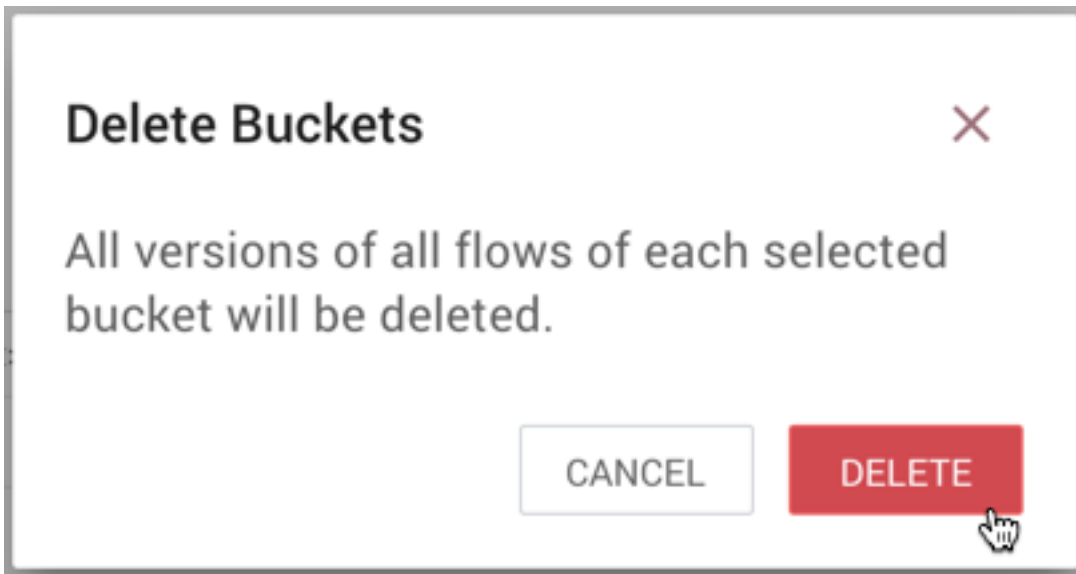


Edit a Bucket Name

1. Select the Manage button

()
 in the row of the bucket.

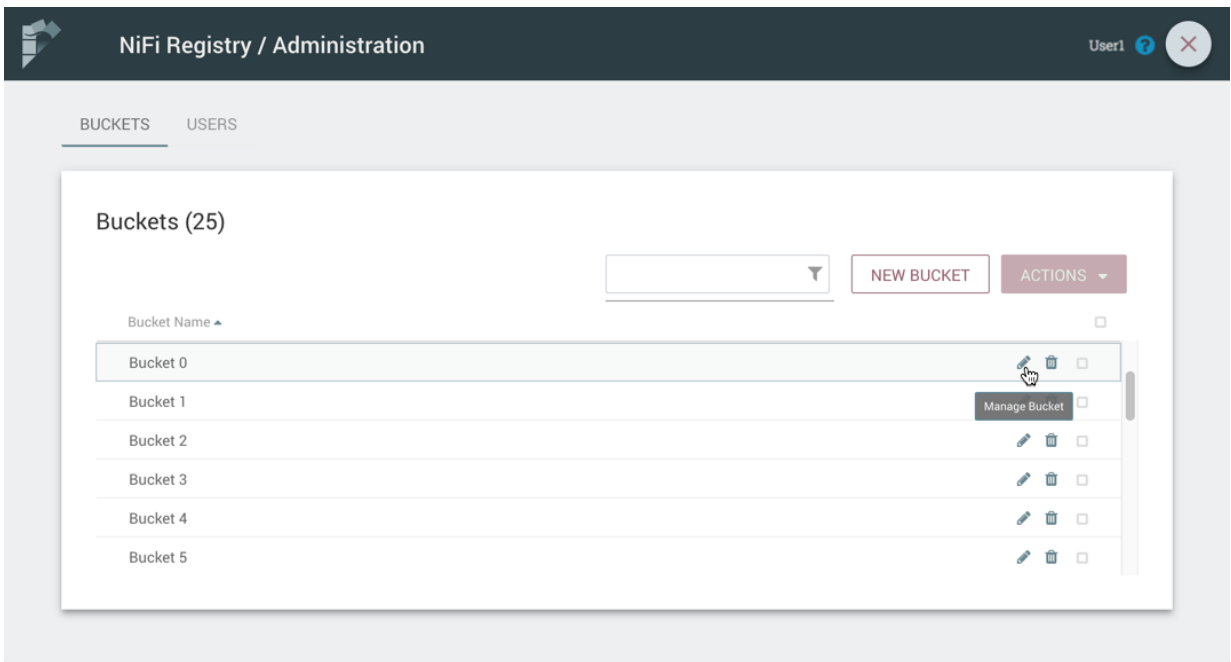

2. Enter a new name for the bucket and select the "Save" button.

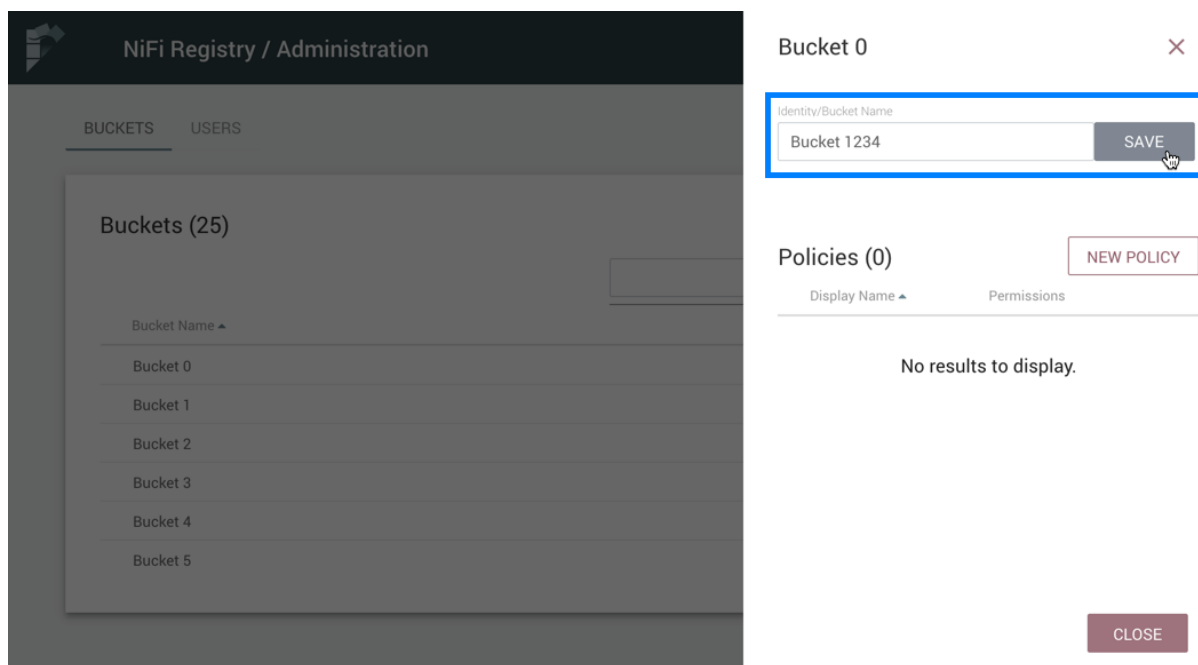

Bucket Policies

Bucket policies define user privileges on buckets/flows in the Registry and in NiFi. The available permissions are:

- All - In the Registry, the assigned user is able to view and delete flows in the bucket. In NiFi, the selected user is able to import flows from the bucket and commit changes to flows in the bucket.
- Read - In the Registry, the assigned user is able to view flows in the bucket. In NiFi, the selected user is able to import flows from the bucket.
- Write - In NiFi, the assigned user is able to commit changes to flows in the bucket.
- Delete - In the Registry, the assigned user is able to delete flows in the bucket.



Note: Users would typically have Read permissions at a minimum. A user with Write permission would not commit changes to a flow if they were not able to import it initially. A user with Delete permission would not delete a flow if they could not view it.



Note: If a user has a bucket policy and the group that the user is in also has a policy, all policies are used to determine access. For example, assume User1 is in Group1, User1 has READ privileges on Bucket1 and Group1 has READ privileges on Bucket2. In this scenario, User1 will have READ privileges on both Bucket1 and Bucket2.


Create a Bucket Policy

1. Select the Manage button



in the row of the bucket.

2. Select the "New Policy" button.

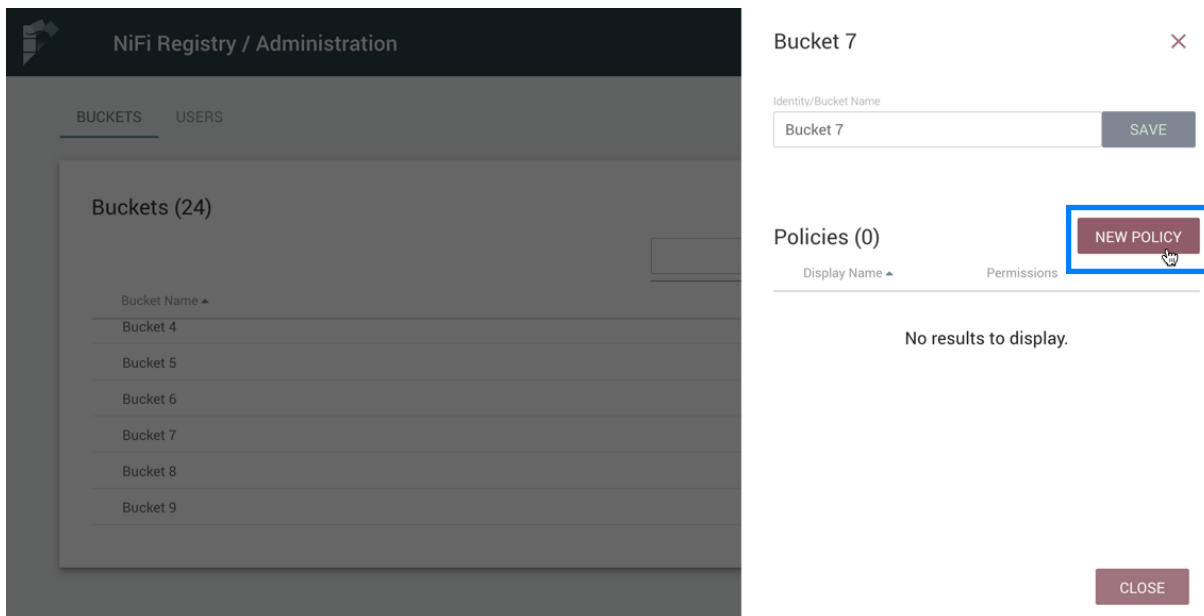

3. Select a user, check the desired permissions and select the "Apply" button:



New Policy ✕

Display Name ▲

User2	<input type="checkbox"/>
User3	<input type="checkbox"/>
User4	<input type="checkbox"/>
User5	<input type="checkbox"/>
User6	<input type="checkbox"/>
User7	<input checked="" type="checkbox"/>
User8	<input type="checkbox"/>
User9	<input type="checkbox"/>

All Read Write Delete

4. The policy is added to the bucket:


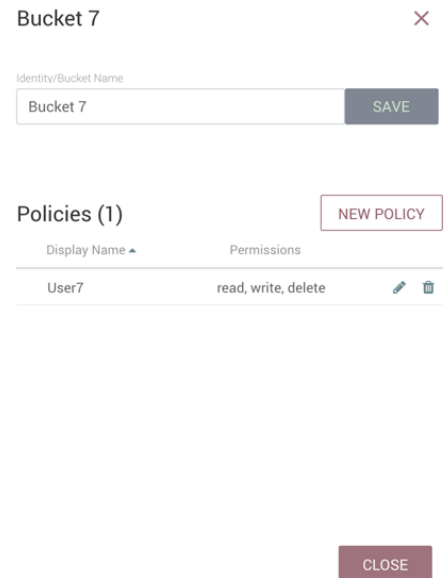
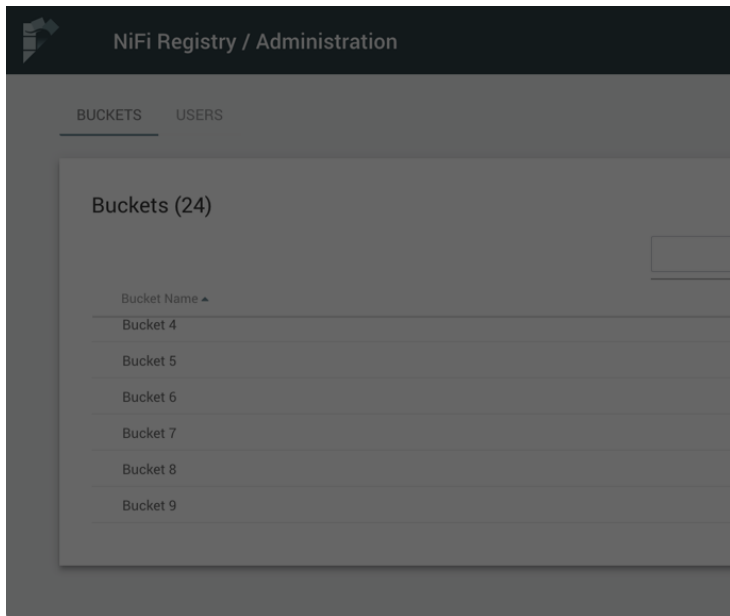


Delete a Bucket Policy


1. Select the Manage button



2. Select the Delete button

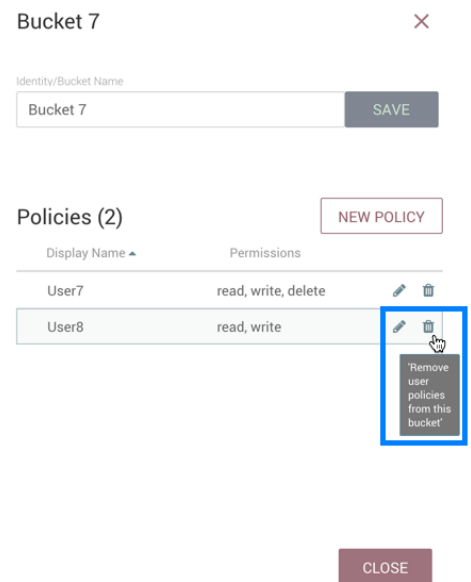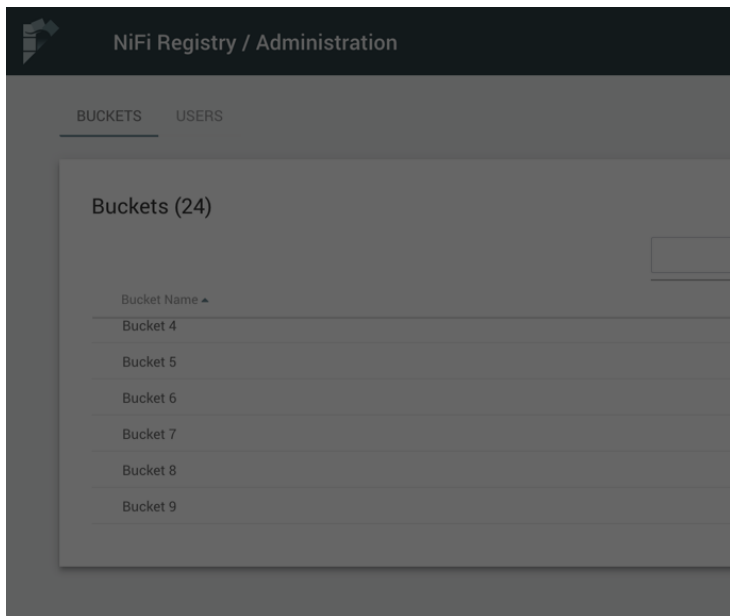

3. From the Delete Policy dialog, select "Delete".

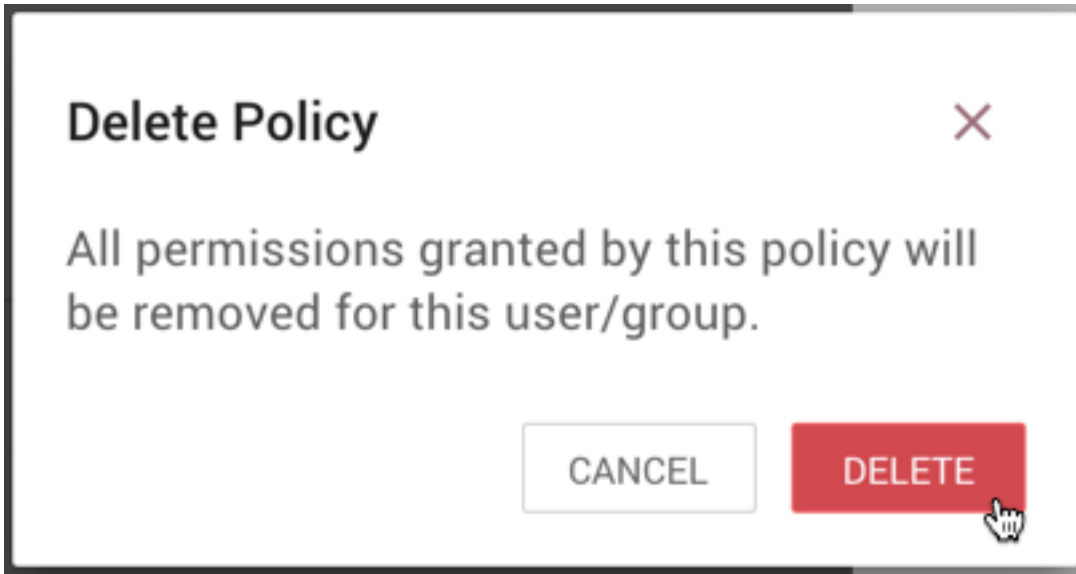

Manage Users & Groups


To manage users/groups, enter the Administration section of the Registry by clicking the Settings button



on the top right of the UI. Select Users from the top menu to open the Users window.

Sorting & Filtering Users/Groups


Users/groups can be sorted alphabetically by Name (ascending or descending) using the up/down arrows.

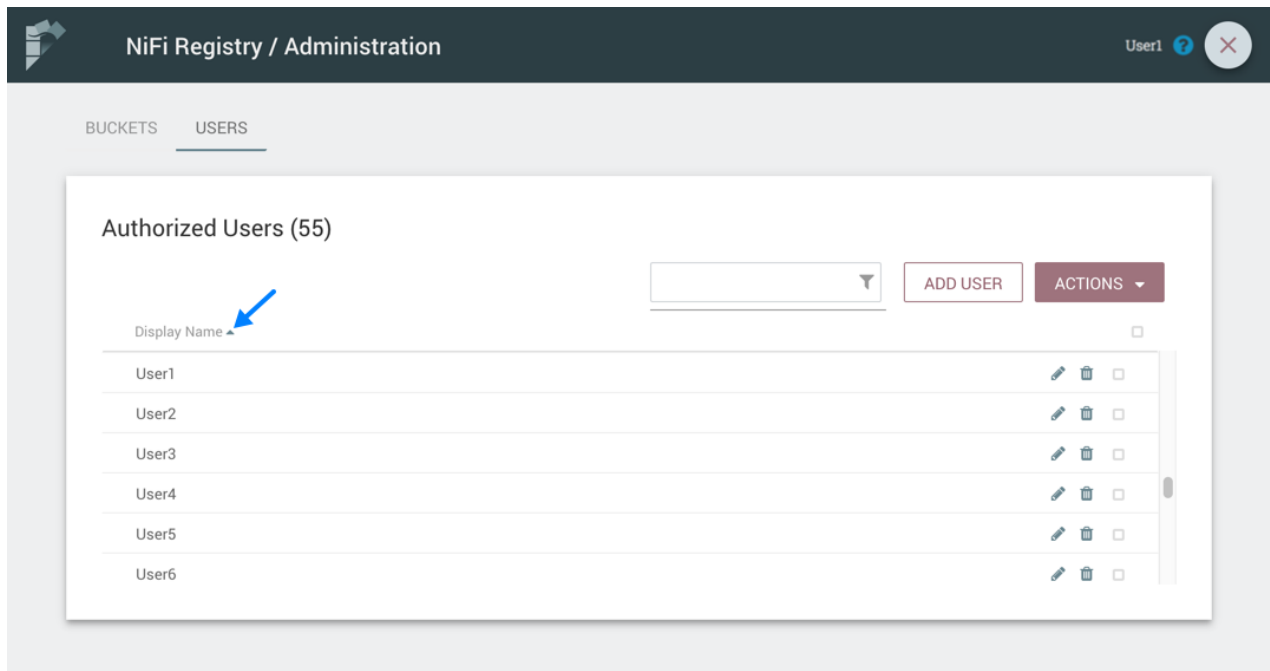

The Users/groups listed can be filtered by:


- user name
- user ID
- group name
- group ID

Here is an example of filtering by user name:

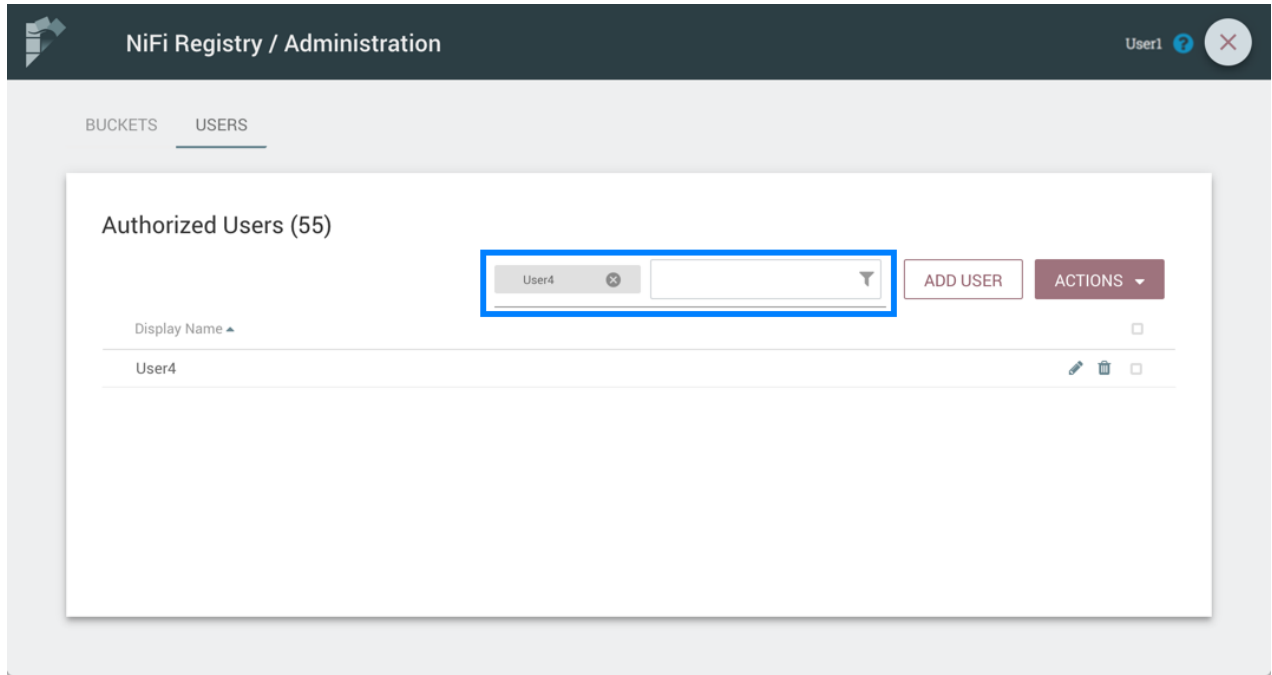


Add a User

1. Select the "Add User" button.

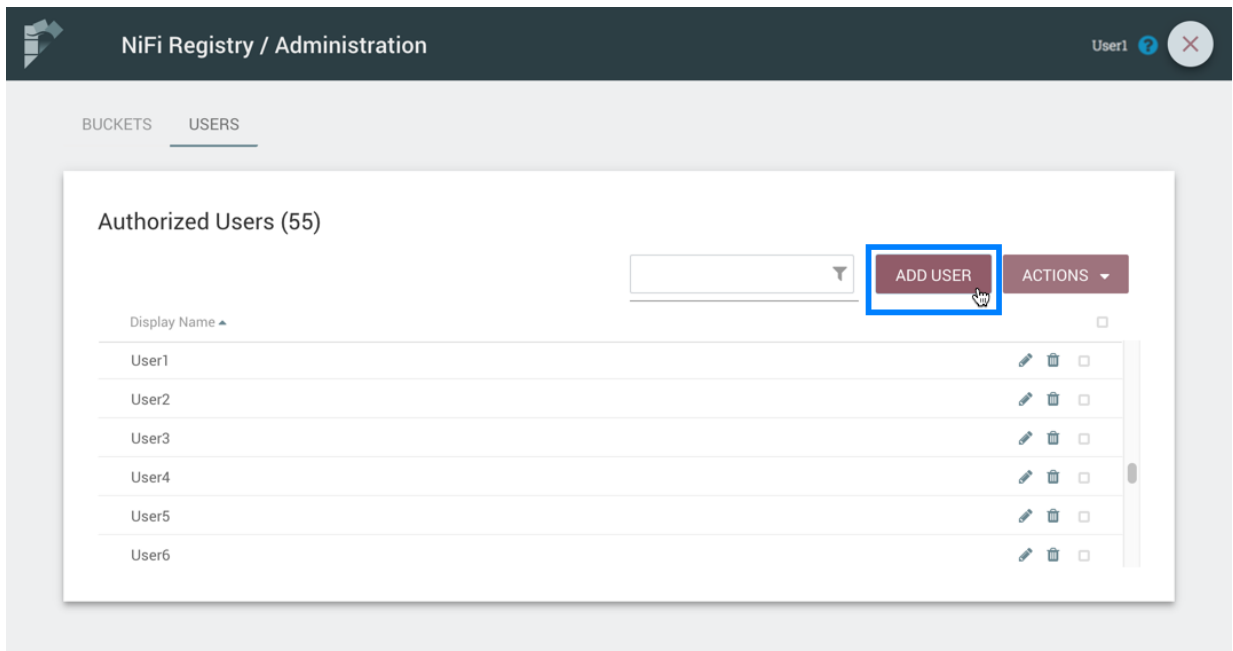

2. Enter the desired username or appropriate Identity information. Select the "Add" button.

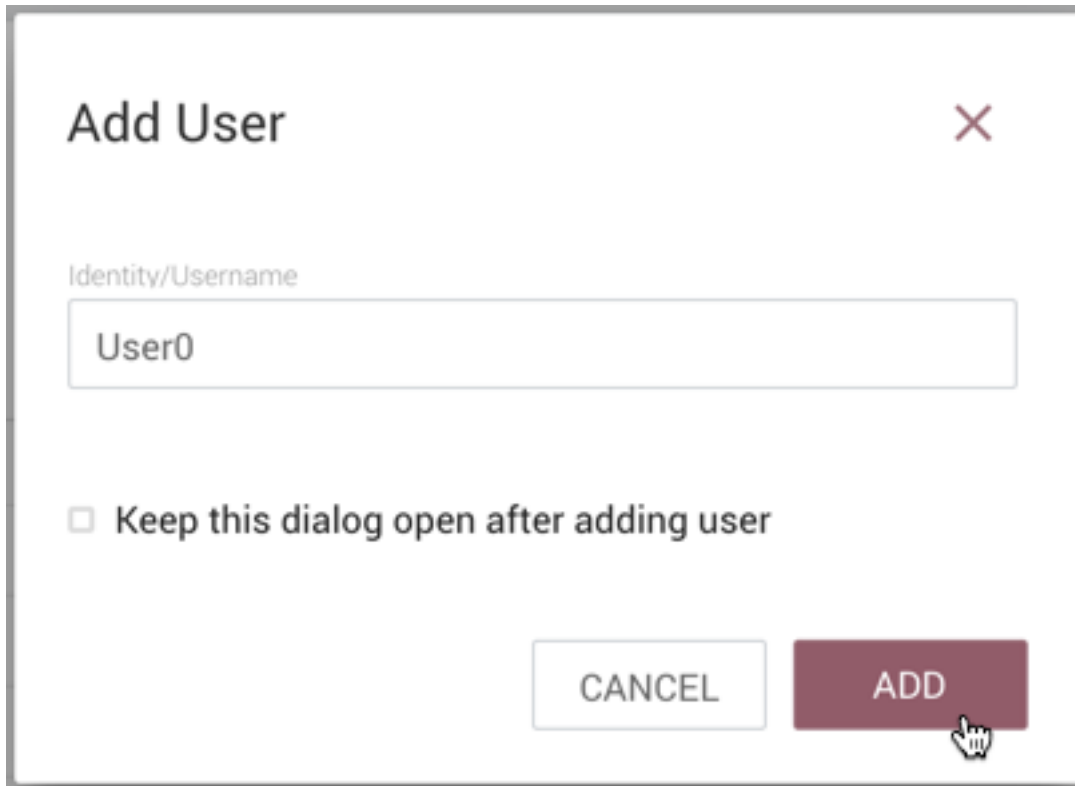


Note: To quickly create multiple users, check "Keep this dialog open after adding user".

Delete a User


1. Select the Delete button



(in the row of the user.)

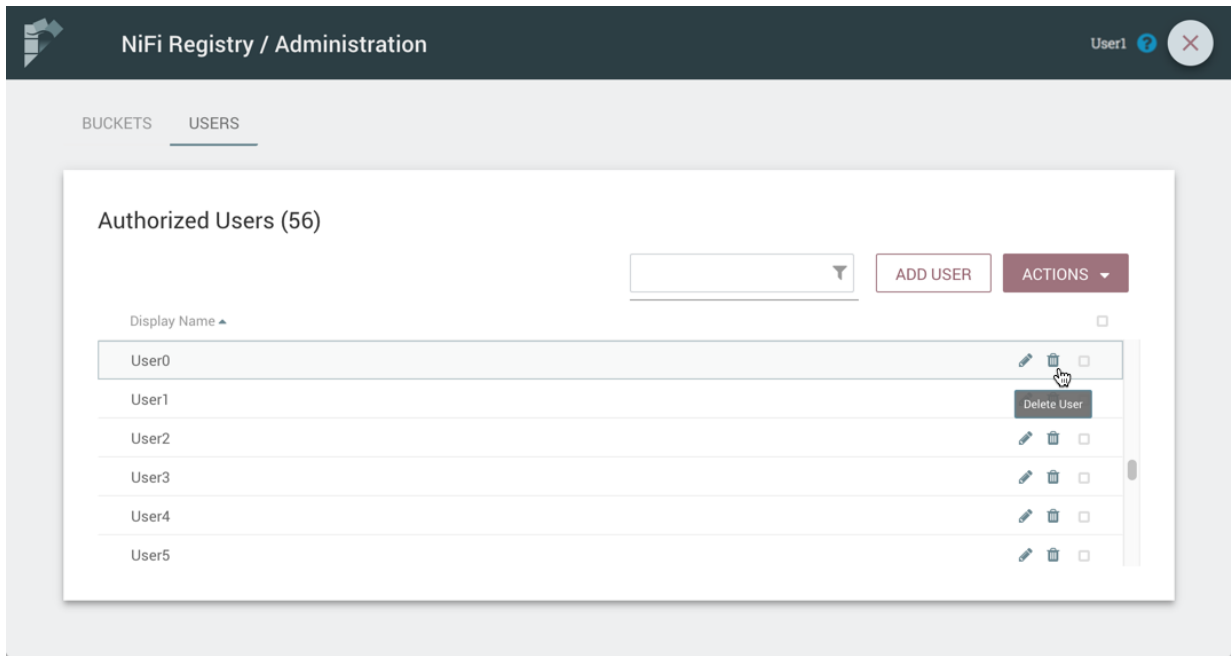


- From the Delete User dialog, select "Delete".

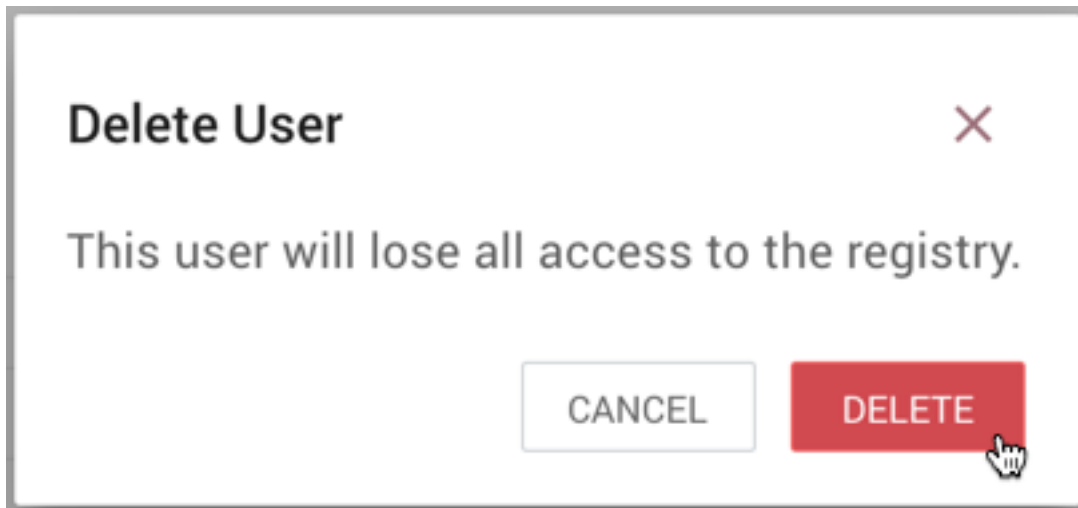


Delete Multiple Users

- Select the checkboxes in the rows of the desired users to delete.

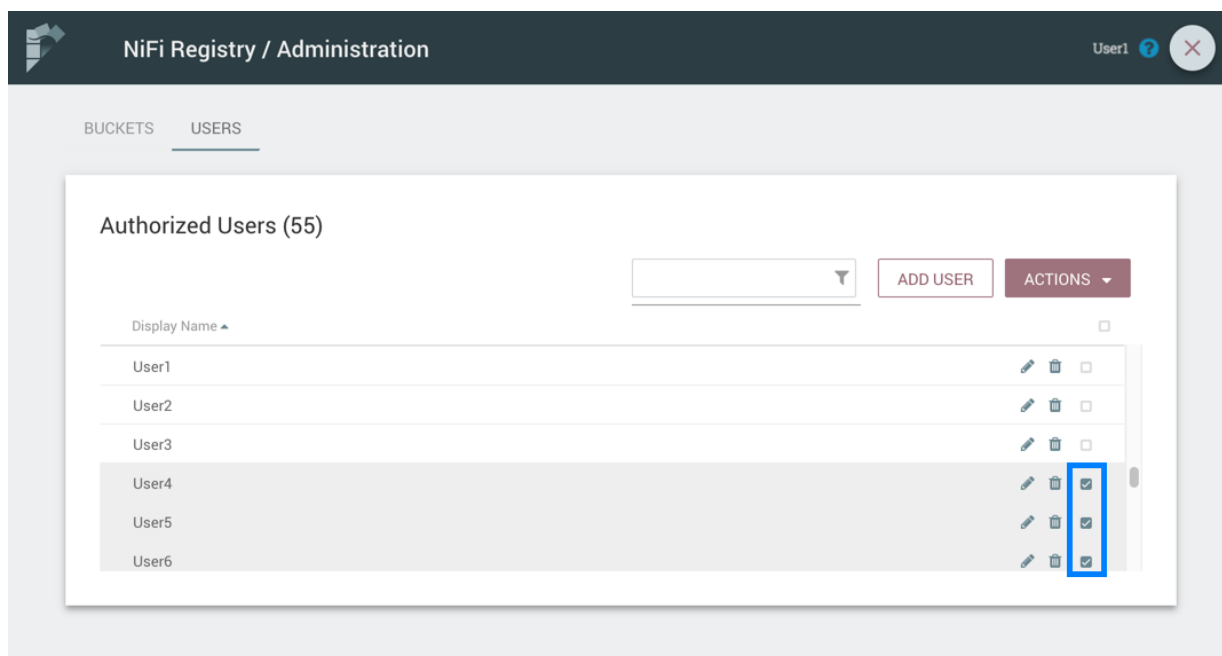


The screenshot shows the NiFi Registry Administration interface. The top navigation bar includes the NiFi logo, the text "NiFi Registry / Administration", and a user profile for "User1". Below the navigation bar, there are two tabs: "BUCKETS" and "USERS", with "USERS" being the active tab. The main content area is titled "Authorized Users (55)". It features a search input field, an "ADD USER" button, and an "ACTIONS" dropdown menu. A table lists users from "User1" to "User6". For each user, there are three icons: a pencil (edit), a trash can (delete), and a square (checkbox). The "ACTIONS" dropdown menu is open, showing "Delete" and "Create new group" options. The "Delete" option is highlighted with a blue box.

2. Select the "Actions" drop-down and click the "Delete" option.

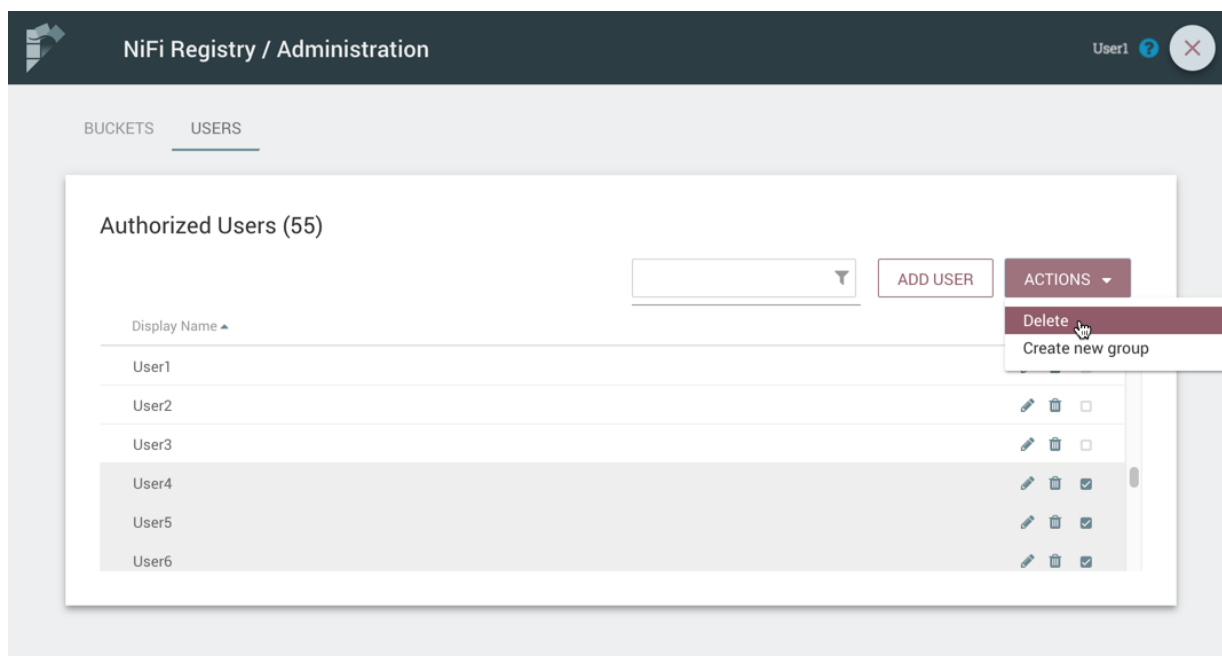

The screenshot shows the NiFi Registry Administration interface. The top navigation bar includes the NiFi logo, the text "NiFi Registry / Administration", and a user profile for "User1". Below the navigation bar, there are two tabs: "BUCKETS" and "USERS", with "USERS" being the active tab. The main content area is titled "Authorized Users (55)". It features a search input field, an "ADD USER" button, and an "ACTIONS" dropdown menu. A table lists users from "User1" to "User6". For each user, there are three icons: a pencil (edit), a trash can (delete), and a square (checkbox). The "ACTIONS" dropdown menu is open, showing "Delete" and "Create new group" options. The "Delete" option is highlighted with a mouse cursor.

3. From the Delete Users dialog, select "Delete".

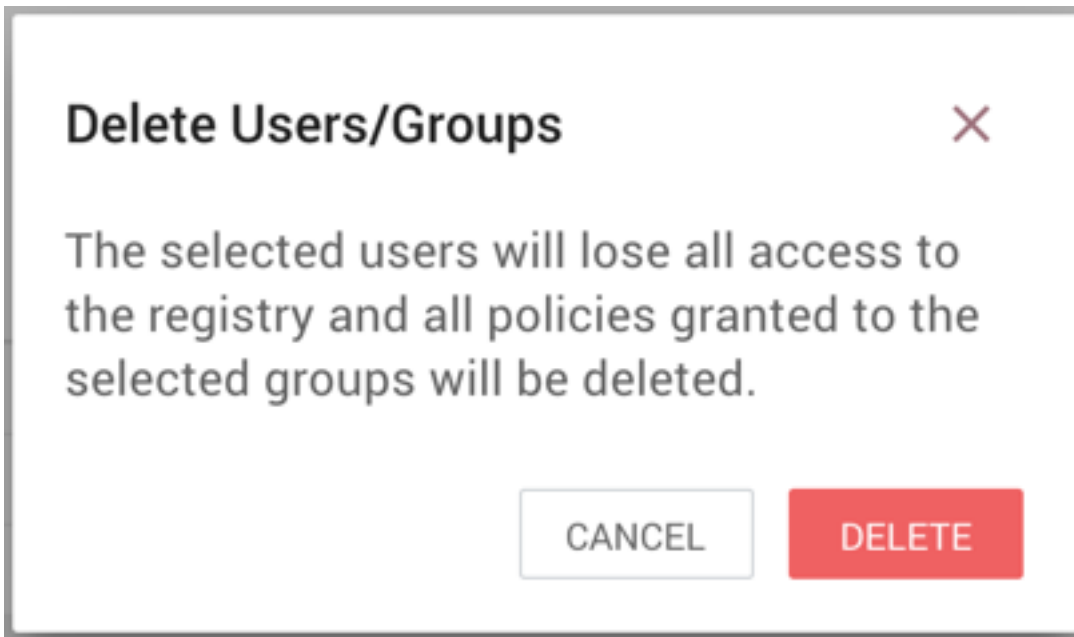


Edit a User Name


1. Select the Manage button




in the row of the user.

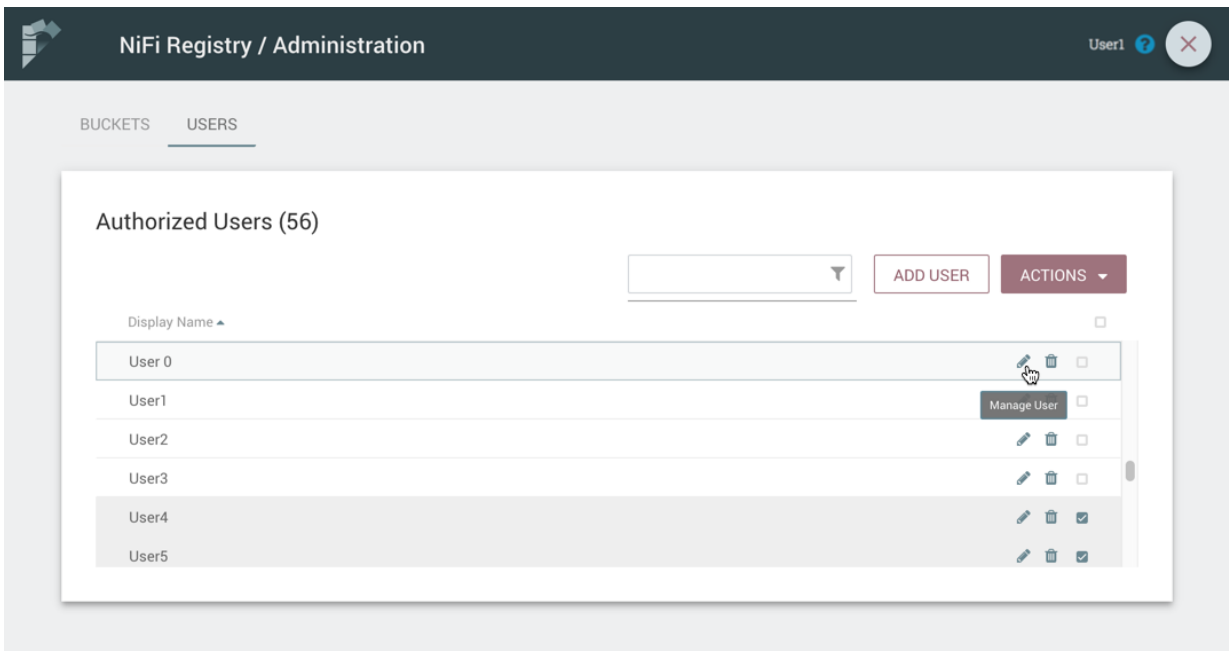

2. Enter a new user name and select the "Save" button.

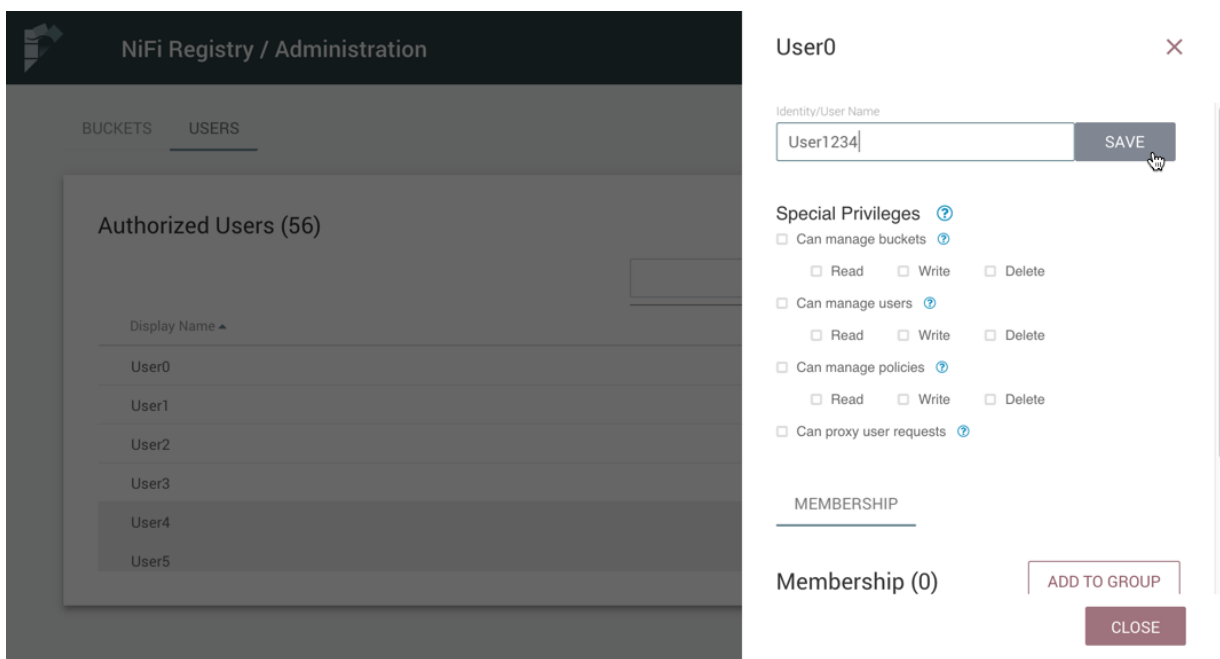

Some users cannot have their names edited. For example, those defined by LDAP. These users will be specially highlighted in the list.

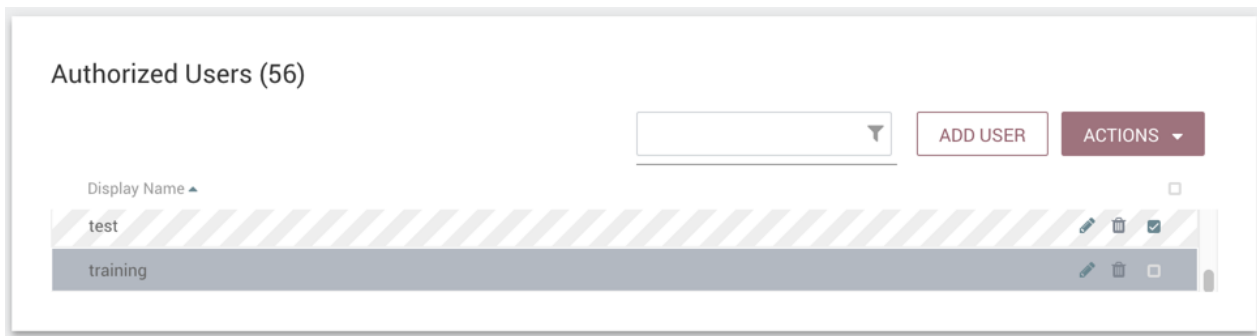


Special Privileges


Special privileges are additional permissions that allow a user to manage or access certain aspects of the Registry. The special privileges are:

- Can manage buckets - Allow a user to manage all buckets in the registry, as well as provide the user access to all buckets from a connected system (e.g., NiFi).
- Can manage users - Allow a user to manage all registry users and groups.
- Can manage policies - Allow a user to grant all registry users read, write, and delete permission to a bucket.
- Can proxy user requests - Allow a connected system (e.g., NiFi) to process requests of authorized users of that system.


Grant Special Privileges to a User

1. Select the Manage button

()
 in the row of the user.

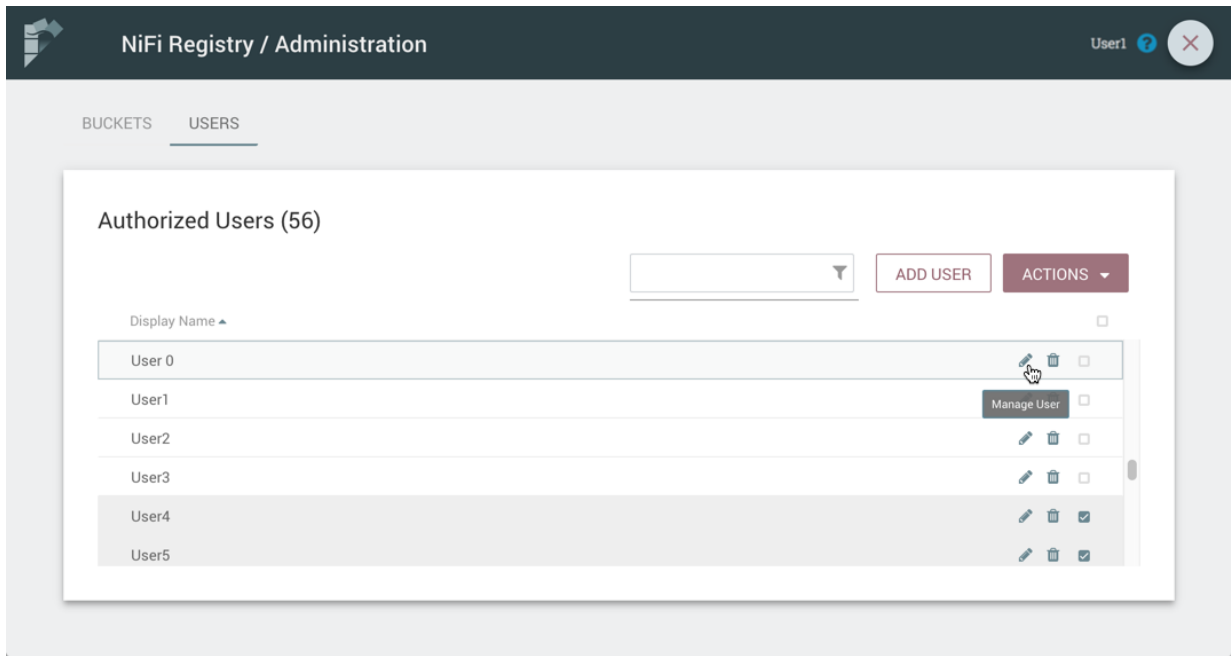

2. Check the desired privileges:

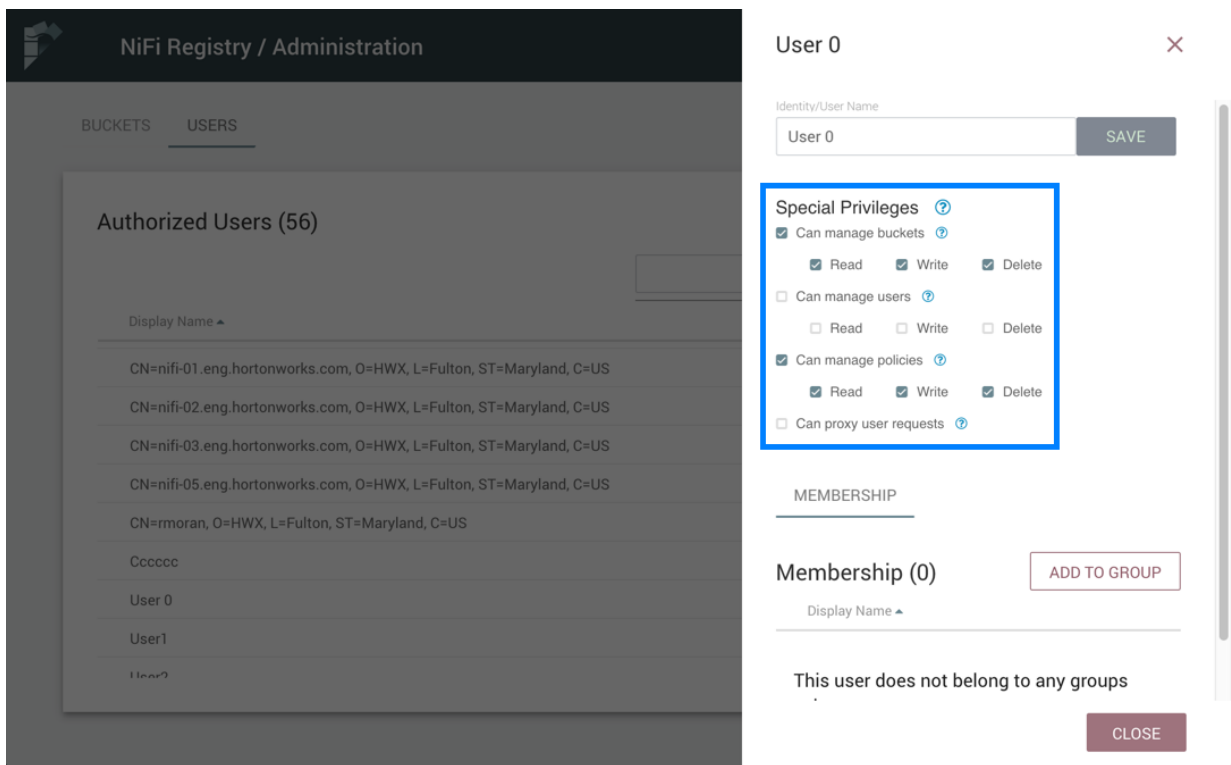


3. Changes made to special privileges are automatically saved.


Manage Groups

Add an Empty Group

1. With no users checked, select the "Actions" drop-down and click the "Create new group" option.

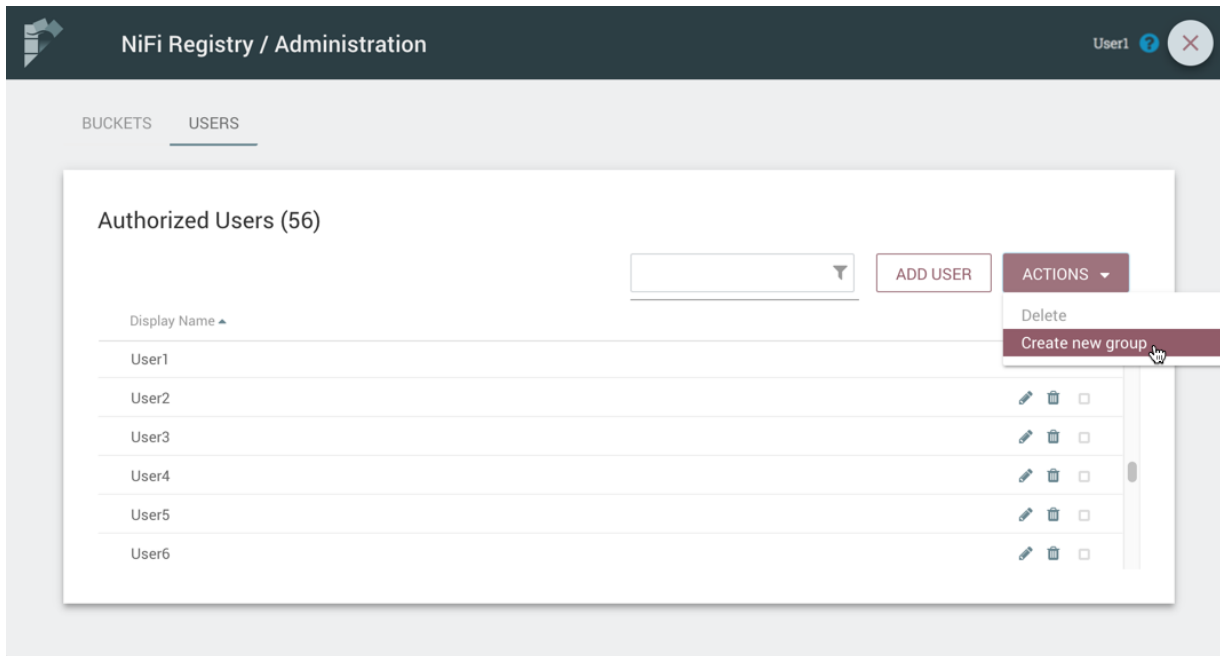

2. Enter a name for the Group and select the "Create" button.

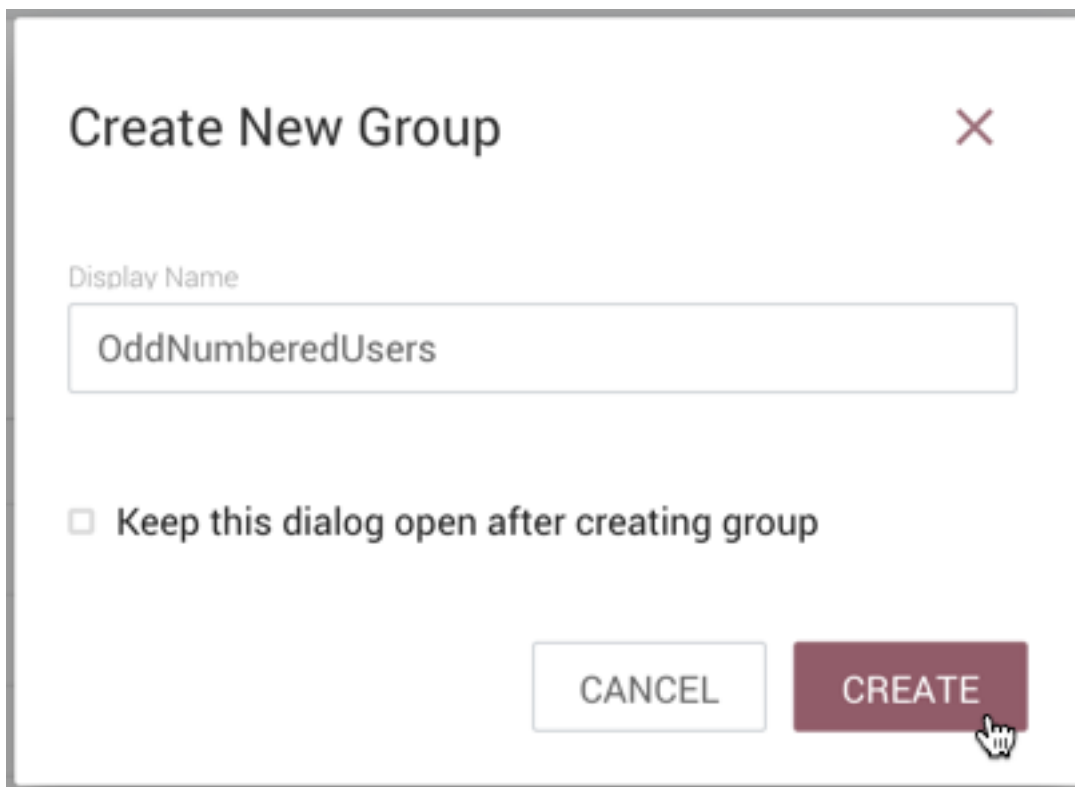

Note: To quickly create multiple empty groups, check "Keep this dialog open after creating group".

Add User to a Group


1. Select the Manage button



in the row of the user.

2. Select the "Add To Group" button.

3. In the "Add User to Groups" dialog, select the group(s) to add the user to. Select the "Add" button when all desired groups have been selected.

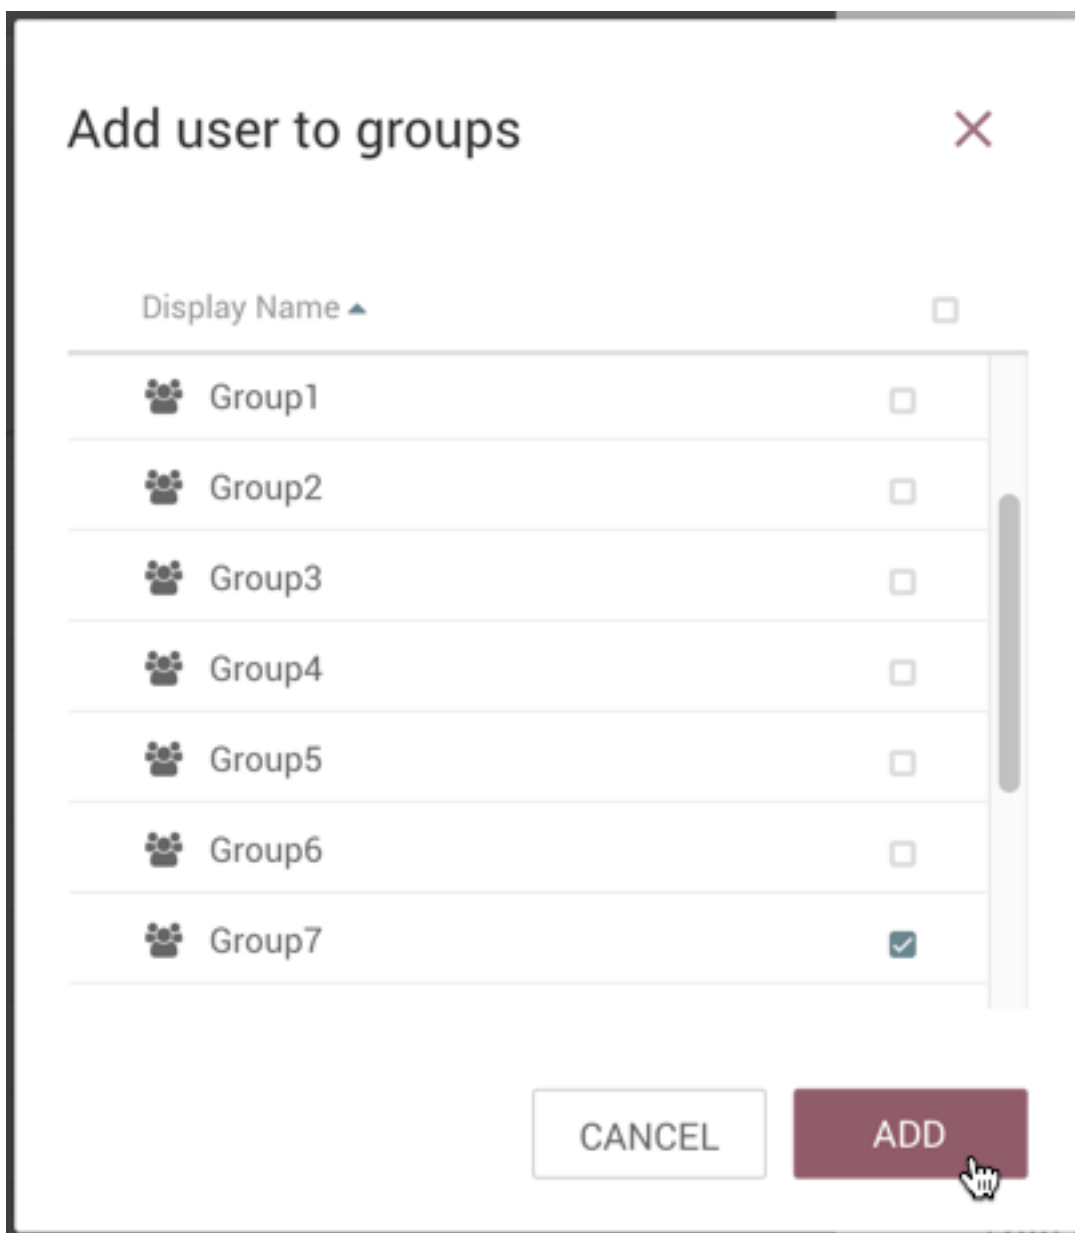

4. The user is added to the group:


The screenshot shows the NiFi Registry Administration interface. The main view is the 'USERS' tab, displaying a list of 'Authorized Users (65)' from User0 to User9. A modal window is open for editing 'User7'. The modal includes a 'Identity/User Name' field with 'User7' entered and a 'SAVE' button. Below this, there are 'Special Privileges' sections with checkboxes for 'Can manage buckets', 'Can manage users', 'Can manage policies', and 'Can proxy user requests'. Each section has sub-options for 'Read', 'Write', and 'Delete'. At the bottom of the modal, there is a 'MEMBERSHIP' section showing 'Membership (1)' with 'Group7' listed and an 'ADD TO GROUP' button. A 'CLOSE' button is located at the bottom right of the modal.




Note: Groups cannot contain other groups.

Create a New Group with Selected Users


1. Select the checkboxes in the rows of the desired users. From the "Actions" drop-down, click the "Create new group" option.

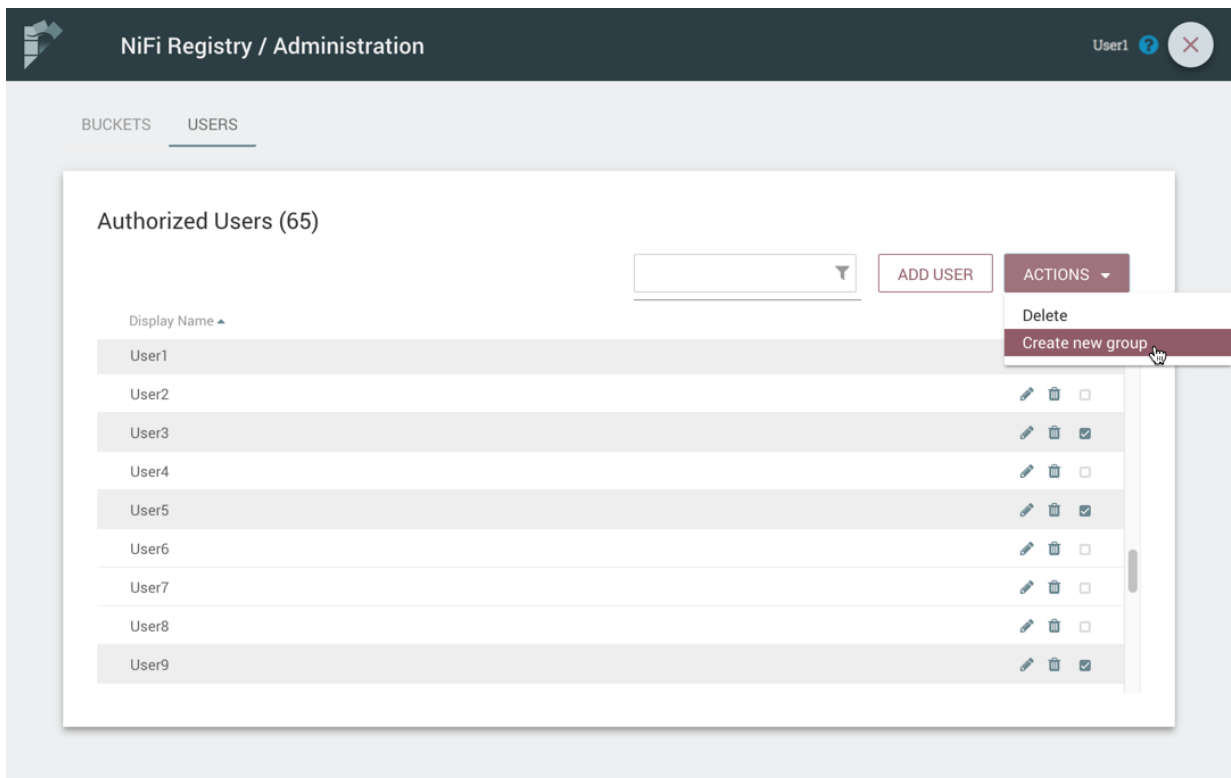

2. Enter a name for the Group and select the "Create" button.

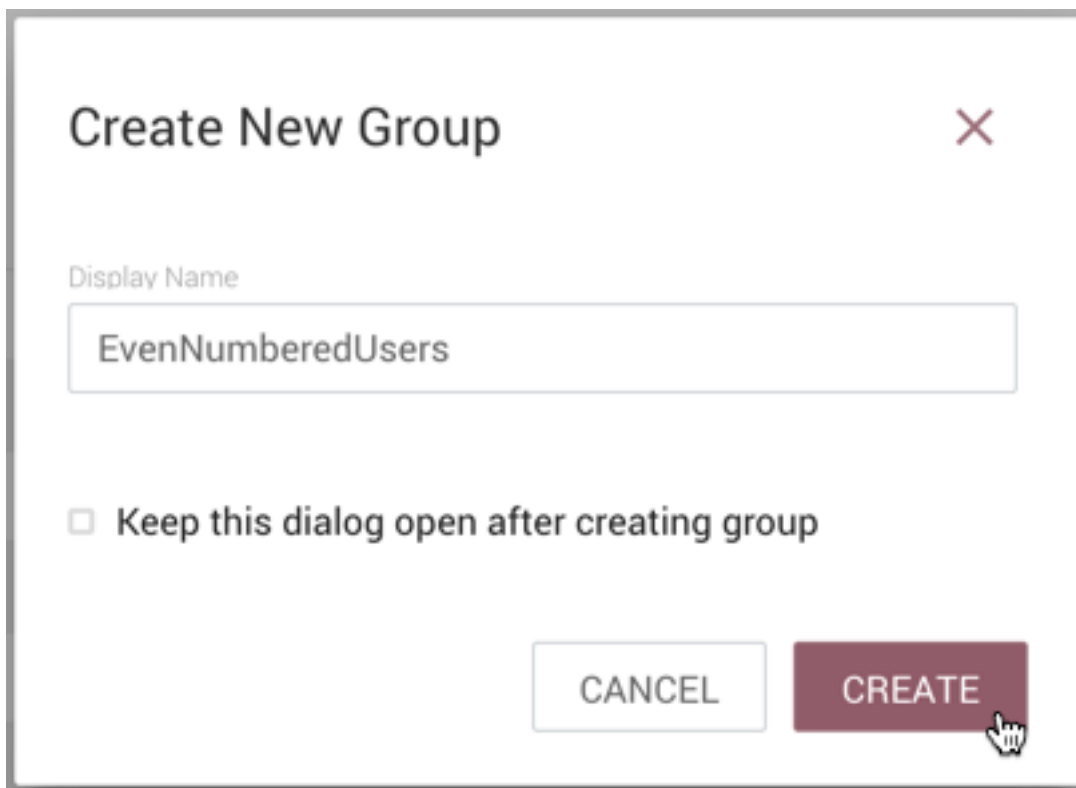

3. The new group is created with the selected users as members:

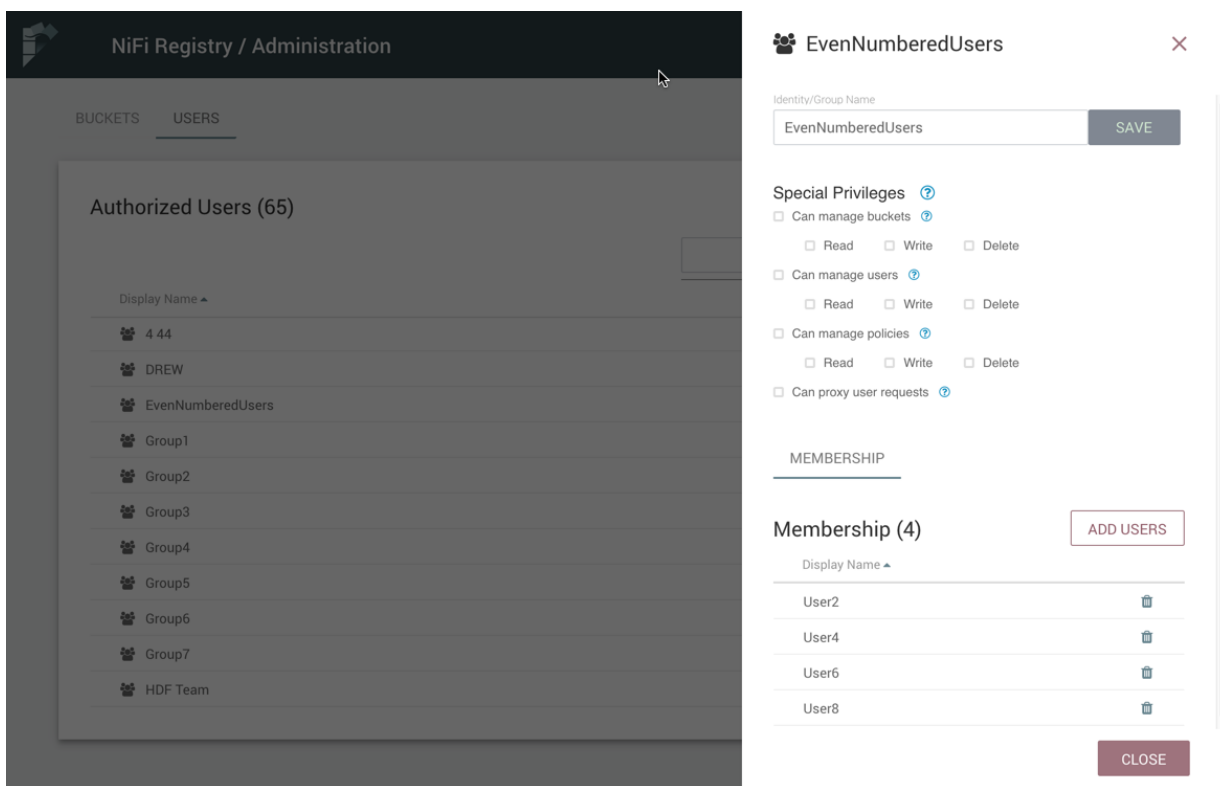

Remove a User from a Group

There are two ways to remove a user from a group.

User Window

1. Select the Manage button




()
in the row of the user.

2. In the Membership section of the window, select the Remove button




()
in the row of the group.

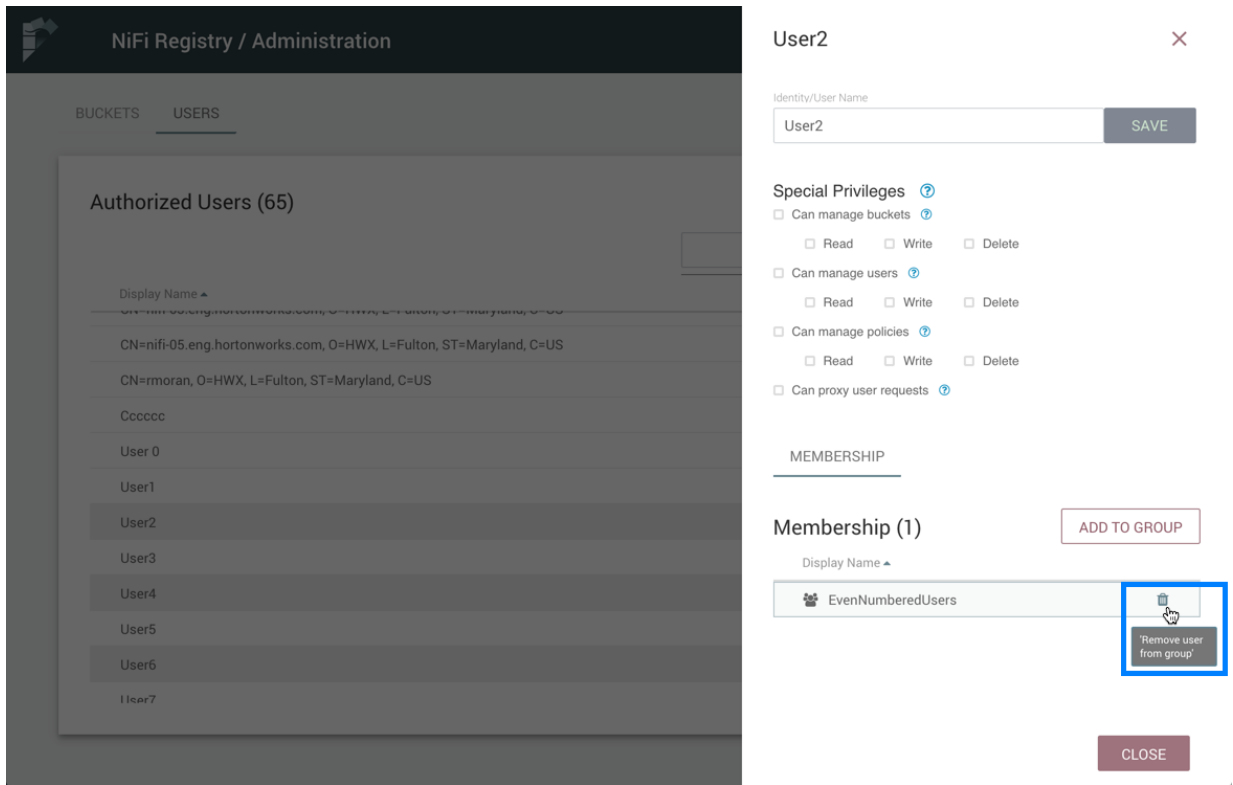


Group Window

1. Select the Manage button

()
 in the row of the group. The Members tab is selected by default.

2. In the Membership section of the window, select the Remove button

()
 in the row of the user.

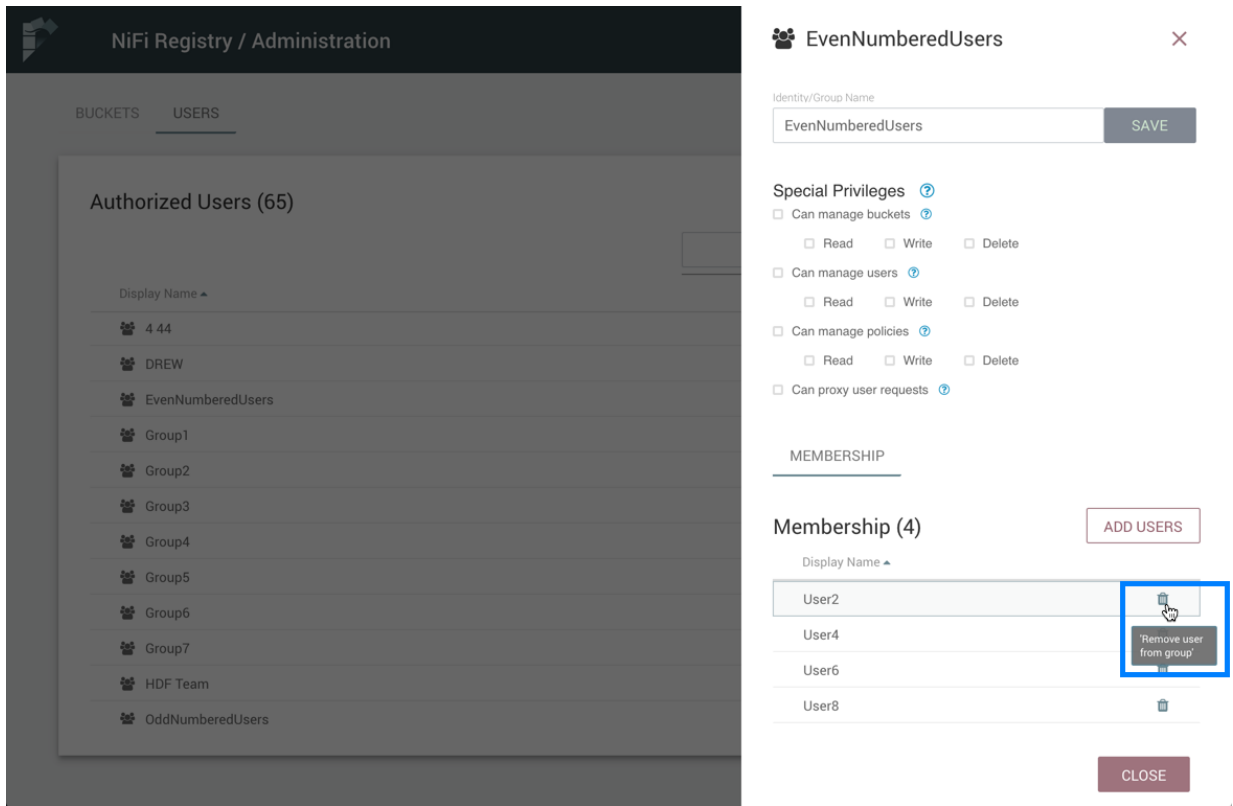

Other Group Level Actions

Editing group names, deleting groups, adding policies to/deleting policies from groups and granting special privileges to groups follow similar procedures described earlier for corresponding user level actions.